

Fixings

Shoulder Screw C/DIN603

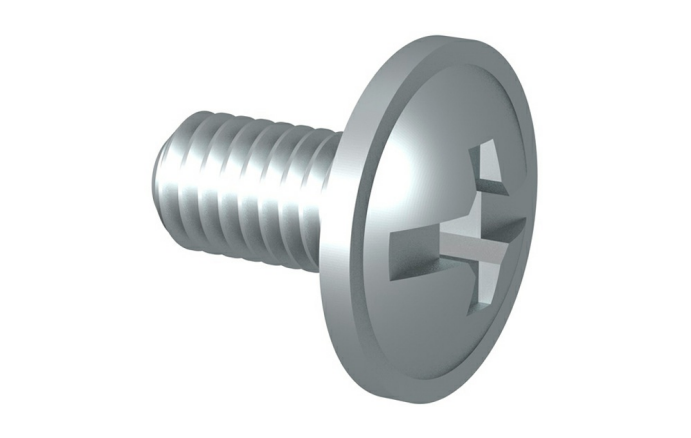

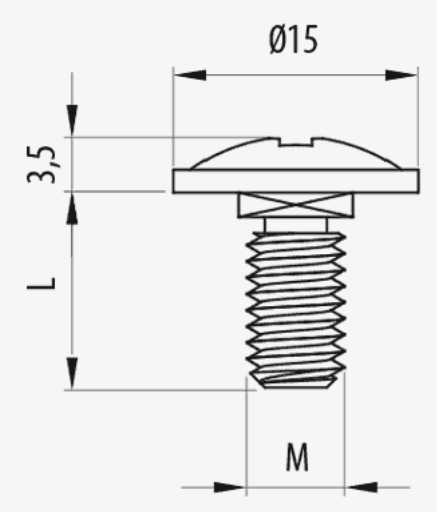

Description

DIN603 semi-spherical metal bolt for fixing and attaching straight lengths of Pemsaband® tray, supports and other accessories, avoiding any damage to the cables when they are laid in the trays. Suitable for Pemsaband® trays of 35, 60 and 85 mm in height.

Advantages

It avoids damaging the cables when they are laid in the trays. The head is embedded in the embossing of the Pemsaband® trays.

Used for the joining of straight sections and any accessory of the Pemsaband® One perforated, solid, Pemsaband® PQU and PQW ranges.

Available in sizes: M6x12 and M6x20.

CE conformity to directive 2014/35 / EU.

Available in different protection systems: EZ, BK8, GC, and stainless steel AISI 316.

Applications

Suitable for the fixing of straight sections, accessories, bends, tees and supports for installations of Pemsaband®, Inducanal® and Pemsaband® PQ metal trays in the management of electrical cables and / or telecommunications in public buildings, infrastructures and civil works , industrial facilities and tertiary sector.

Solutions

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Shoulder Screw C/DIN603

Main technical characteristics

M 6	100	-50 / 150 °C	A1 No combustible	ETIM 10 EC003861

Product data

Ⓢ	Class IEC 61537		REF	kg/u	Ⓜ
EZ	Class 3	12	67010099	0,005	Steel with surface coating
EZ	Class 3	20	67010100	0,007	Steel with surface coating
GC	Class 8	12	67030099	0,005	Steel with surface coating
GC	Class 8	20	67030100	0,007	Steel with surface coating
GC	Class 8	30	67030109	0,013	Steel with surface coating
INOX	Class 9D	12	67060099	0,005	Acero inoxidable AISI 316L
INOX	Class 9D	20	67060100	0,007	Acero inoxidable AISI 316L

Ⓢ Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Ⓜ Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."