
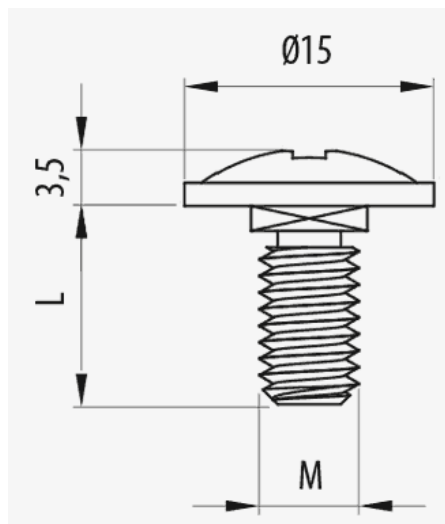


## Shoulder Screw C/DIN603 ( Ref: 67010099 )

1/2

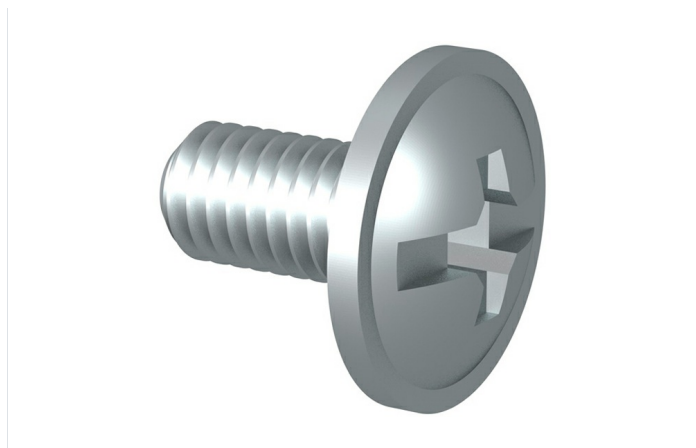

### Description

DIN603 semi-spherical metal bolt for fixing and attaching straight lengths of Pemsaband® tray, supports and other accessories, avoiding any damage to the cables when they are laid in the trays. M 6, M 6, With EZ protection system, EZ3 finish. Suitable for Pemsaband® trays of 35, 60 and 85 mm in height.

### Advantages

CE conformity to directive 2014/35 / EU.

Available in sizes: M6x12 and M6x20.

Available in different protection systems: EZ, BK8, GC, and stainless steel AISI 316.

It avoids damaging the cables when they are laid in the trays. The head is embedded in the embossing of the Pemsaband® trays.

Used for the joining of straight sections and any accessory of the Pemsaband® One perforated, solid, Pemsaband® PQU and PQW ranges.

### Applications

Suitable for the fixing of straight sections, accessories, bends, tees and supports for installations of Pemsaband®, Inducanal® and Pemsaband® PQ metal trays in the management of electrical cables and / or telecommunications in public buildings, infrastructures and civil works , industrial facilities and tertiary sector.

### Solutions



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



| Product data                          |  |                            |     |
|---------------------------------------|--|----------------------------|-----|
| ETIM 10                               |  | EC003861                   |     |
| Huella de CO2. GWP A1-A3 (kg CO2 eq.) |  | u                          | 100 |
| Protection System                     |  | EZ                         |     |
| Material                              |  | Steel with surface coating |     |
| Finish                                |  | EZ3, Electrogalvanised     |     |
| Working temperature range (°C)        |  | -50 / 150 °C               |     |
| Resistance Class                      |  | Class 3                    |     |
| Fire resistance                       |  | A1 No combustible          |     |
| M/PG                                  |  | M 6                        |     |
| G (mm)                                |  | 12                         |     |

| Protection System                 |
|-----------------------------------|
| CU - Copper electroplated         |
| PG - Pregalvanised                |
| EZ - Electrogalvanised            |
| BC - Electrogalvanised Bichromate |
| BK8 - High Resistance Coating     |
| GC - Hot Dip Galvanising          |
| INOX - Stainless Steel            |
| PT - Polyester Paint              |
| AL - Aluminum                     |
| LN - Brass or Nickel-plated brass |

| Insulating materials                      |
|-------------------------------------------|
| PC+ABS - Halogen Free Polycarbonate + ABS |
| PVC - Polyvinyl Chloride                  |
| PP - Halogen Free Polypropylene           |
| PA6 - Halogen Free Polyamide 6            |
| PA12 - Halogen Free Polyamide 12          |
| PU - Polyurethane                         |
| PE - Polyethylene                         |
| NBR - NBR rubber                          |
| PET - Thermoplastic Polyester             |
| TPV - Thermoplastic                       |