
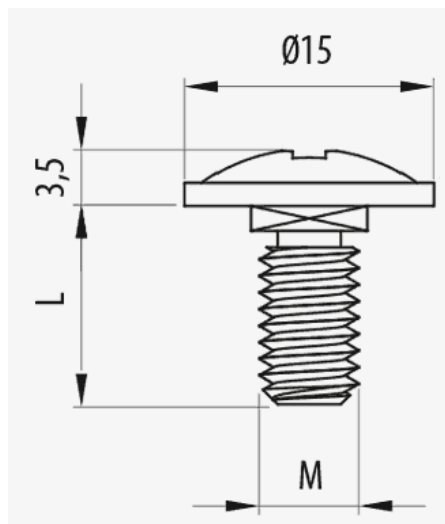


Shoulder Screw C/DIN603 (Ref: 67060099)

1/2

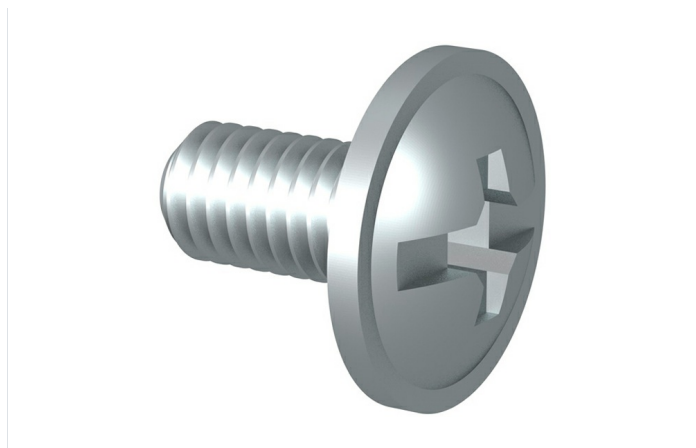

Description

DIN603 semi-spherical metal bolt for fixing and attaching straight lengths of Pemsaband® tray, supports and other accessories, avoiding any damage to the cables when they are laid in the trays. M 6, M 6, With INOX protection system, I316L finish. Suitable for Pemsaband® trays of 35, 60 and 85 mm in height.

Advantages

CE conformity to directive 2014/35 / EU.

Available in sizes: M6x12 and M6x20.

Available in different protection systems: EZ, BK8, GC, and stainless steel AISI 316.

It avoids damaging the cables when they are laid in the trays. The head is embedded in the embossing of the Pemsaband® trays.

Used for the joining of straight sections and any accessory of the Pemsaband® One perforated, solid, Pemsaband® PQU and PQW ranges.

Applications

Suitable for the fixing of straight sections, accessories, bends, tees and supports for installations of Pemsaband®, Inducanal® and Pemsaband® PQ metal trays in the management of electrical cables and / or telecommunications in public buildings, infrastructures and civil works , industrial facilities and tertiary sector.

Solutions



www.pemsa-rejiband.com



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Product data			
ETIM 10		EC003861	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		u	100
Protection System		INOX	
Material		Acero inoxidable AISI 316L	
Finish		Stainless Steel AISI 316L	
Working temperature range (°C)		-50 / 150 °C	
Resistance Class		Class 9D	
Fire resistance		A1 No combustible	
M/PG		M 6	
G (mm)		12	

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic