
Fixings

17/11/2026

Shoulder Screw C/DIN603 (Ref: 67060100)

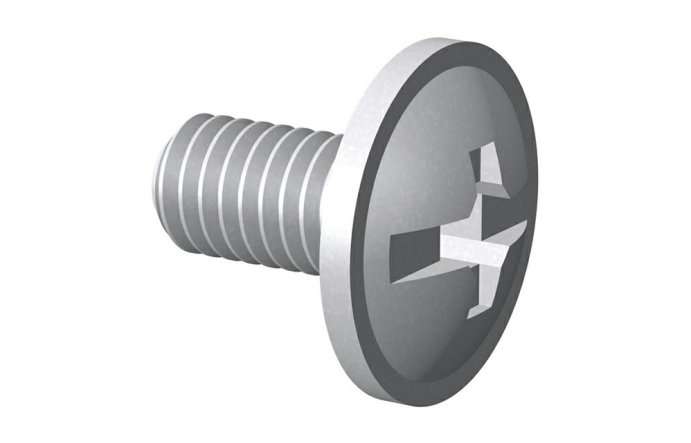

Description

DIN603 semi-spherical metal bolt for fixing and attaching straight lengths of Pemsaband® tray, supports and other accessories, avoiding any damage to the cables when they are laid in the trays. M 6, M 6, With INOX protection system, I316L finish. Suitable for Pemsaband® trays of 35, 60 and 85 mm in height.

Advantages

CE conformity to directive 2014/35 / EU.

Available in sizes: M6x12 and M6x20.

Available in different protection systems: EZ, BK8, GC, and stainless steel AISI 316.

It avoids damaging the cables when they are laid in the trays. The head is embedded in the embossing of the Pemsaband® trays.

Used for the joining of straight sections and any accessory of the Pemsaband® One perforated, solid, Pemsaband® PQU and PQW ranges.

Applications

Suitable for the fixing of straight sections, accessories, bends, tees and supports for installations of Pemsaband®, Inducanal® and Pemsaband® PQ metal trays in the management of electrical cables and / or telecommunications in public buildings, infrastructures and civil works , industrial facilities and tertiary sector.

Solutions

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Shoulder Screw C/DIN603 (Ref: 67060100)

Product data

ETIM 10	EC003861	**kg/u**	0,007
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		**u**	100
Protection System	INOX	**Material**	Acero inoxidable AISI 316L
Finish	Stainless Steel AISI 316L	**Working temperature range (°C)**	-50 / 150 ºC
Resistance Class	Class 9D	**Fire resistance**	A1 No combustible
M/PG	M 6		
G (mm)	20		

Ⓢ Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Ⓜ Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."