


Shoulder Screw C/DIN603 (Ref: 67060100)

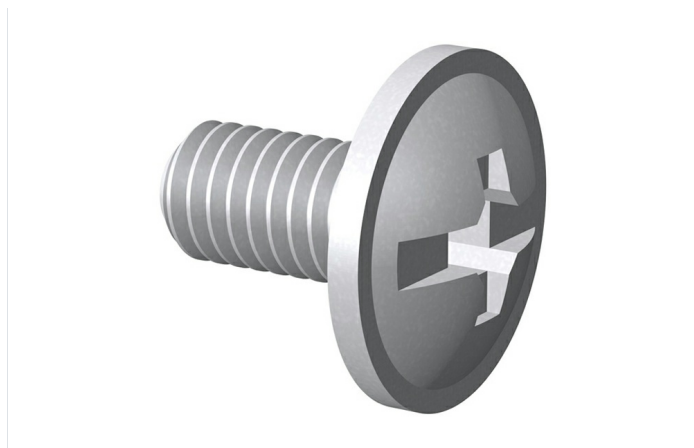

Description

DIN603 semi-spherical metal bolt for fixing and attaching straight lengths of Pemsaband® tray, supports and other accessories, avoiding any damage to the cables when they are laid in the trays. M 6, M 6, With INOX protection system, I316L finish. Suitable for Pemsaband® trays of 35, 60 and 85 mm in height.

Advantages

CE conformity to directive 2014/35 / EU.

Available in sizes: M6x12 and M6x20.

Available in different protection systems: EZ, BK8, GC, and stainless steel AISI 316.

It avoids damaging the cables when they are laid in the trays. The head is embedded in the embossing of the Pemsaband® trays.

Used for the joining of straight sections and any accessory of the Pemsaband® One perforated, solid, Pemsaband® PQU and PQW ranges.

Applications

Suitable for the fixing of straight sections, accessories, bends, tees and supports for installations of Pemsaband®, Inducanal® and Pemsaband® PQ metal trays in the management of electrical cables and / or telecommunications in public buildings, infrastructures and civil works , industrial facilities and tertiary sector.

Solutions



Product data			
ETIM 10		EC003861	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		u	100
Protection System		INOX	
Finish		Stainless Steel AISI 316L	
Resistance Class		Class 9D	
M/PG		M 6	
G (mm)		20	
		kg/u	0,007
		Material	Acero inoxidable AISI 316L
		Working temperature range (°C)	-50 / 150 °C
		Fire resistance	A1 No combustible

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic