

Fixings

# Hexagonal Set Screw ( Ref: 67020059 )



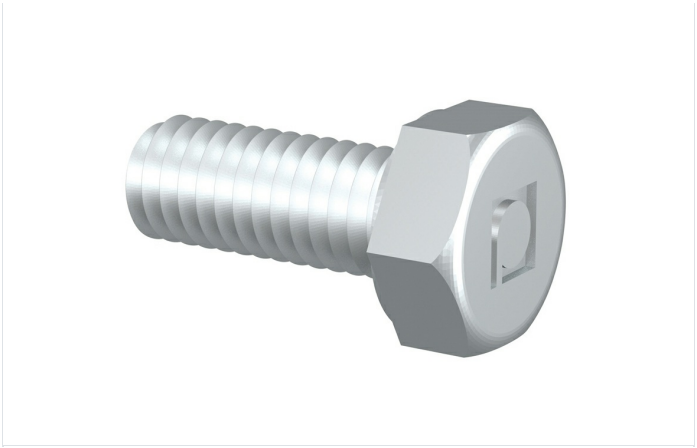

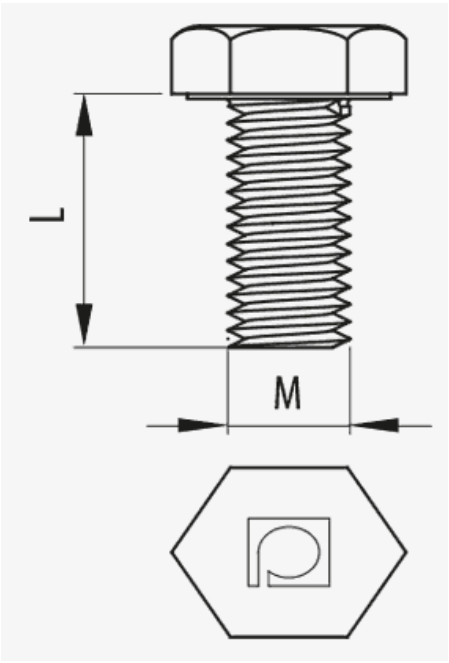


## Description

Metal bolt with hexagonal head for fixing joints, supports and channel structures for tray installations. M10, M10, With EZ protection system, EZ3 finish. Available in M8x15, M8x20, M8x35, M8x65, M10x20, M10x35 and M10x60. Made of steel and various Protection Systems.

## Advantages

CE conformity to directive 2014/35 / EU.

Available in various sizes: M6, M8 and M10 and lengths, 15, 20, 35 and 60 mm according to the protection systems.

Available in several protection systems: EZ, GC and AISI316L stainless steel.

## Applications

Suitable for the fixing of joints, supports and channel structures in tray installations for the management of electrical cables and / or telecommunications in public buildings, infrastructures and civil works, industrial facilities and the tertiary sector.

## Solutions



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

# Hexagonal Set Screw ( Ref: 67020059 )

## Product data

| | | | |
|---|---|---|---|
| **ETIM 10** | EC003861 | **kg/u** | 0,023 |
| **Huella de CO2. GWP A1-A3 (kg CO2 eq.)** | | **u** | 100 |
| **Protection System** | EZ | **Material** | Steel with surface coating |
| **Finish** | EZ3, Electrogalvanised | **Working temperature range (°C)** | -50 / 150 °C |
| **Resistance Class** | Class 3 | **Fire resistance** | A1 No combustible |
| **M/PG** | M10 | | |
| **G (mm)** | 20 | | |

## Ⓢ Protection System

**CU** - Copper electroplated

**PG** - Pregalvanised

**EZ** - Electrogalvanised

**BC** - Electrogalvanised Bichromate

**BK8** - High Resistance Coating

**GC** - Hot Dip Galvanising

**INOX** - Stainless Steel

**PT** - Polyester Paint

**AL** - Aluminum

**LN** - Brass or Nickel-plated brass

## Ⓜ Insulating materials

**PC+ABS** - Halogen Free Polycarbonate + ABS

**PVC** - Polyvinyl Chloride

**PP** - Halogen Free Polypropylene

**PA6** - Halogen Free Polyamide 6

**PA12** - Halogen Free Polyamide 12

**PU** - Polyurethane

**PE** - Polyethylene

**NBR** - NBR rubber

**PET** - Thermoplastic Polyester

**TPV** - Thermoplastic



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."