


Hexagonal Set Screw M8x65

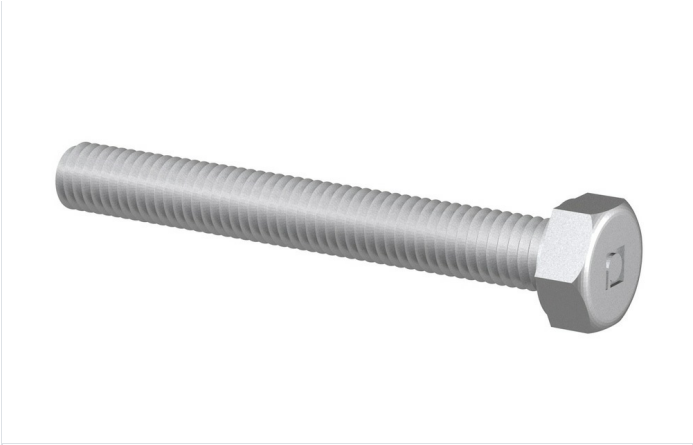

Description

Advantages

Applications

Solutions



Main technical characteristics

 M 8	 65	 kg/u 0,040	 100	 Steel with surface coating	 -50 / 150 °C	 A1 No combustible	ETIM 10 EC003861
---	--	--	---	--	--	---	---------------------

Product data

		Ref
EZ	Class 3	67020092
GC	Class 8	67030092

 Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

 Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic

