
Fixings

Serrated Hexagon Flange Nut



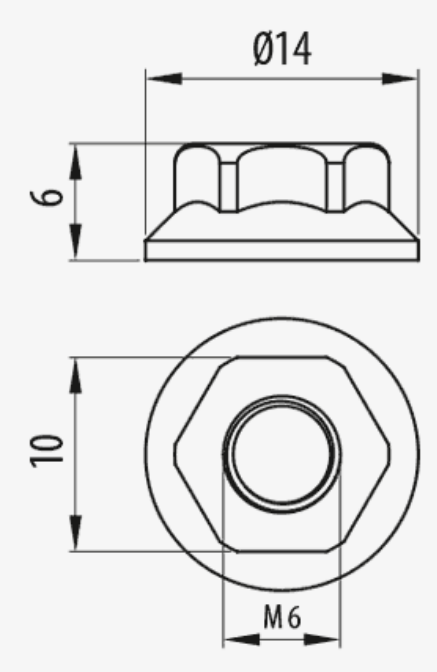

Description

M6 metal nut with serrated flange to be used together with a bolt for the fixing of accessories, brackets or joining straight sections of Pemsaband® trays. Suitable for Pemsaband® trays of 35, 60 and 85 mm in height.

Advantages

The serrated edge reinforces the tightening of the nut on the bolt.

Very versatile piece.

CE conformity to directive 2014/35 / EU.

Available in different protection systems: EZ, BK8, GC, and stainless steel AISI 316.

Applications

Suitable for the fixing together, along with the C/Din screw, of straight sections, accessories, bends, tees and supports for installations of Pemsaband® One perforated and solid, Pemsaband® PQU and Pemsaband® PQW metal trays in the management and distribution of cables for Petrochemical, Oil & Gas, Offshore, Civil works and Infrastructure installations as well as for tunnels and installation galleries.

Solutions

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Serrated Hexagon Flange Nut

Main technical characteristics

M 6	kg/u 0,004	50	-50 / 150 °C	A1 No combustible	ETIM 10 EC003863

Product data

Ⓢ	Class IEC 61537	REF	Ⓜ
EZ	Class 3	64010059	Steel with surface coating
GC	Class 8	64030059	Steel with surface coating
INOX	Class 9D	64060059	Acero inoxidable AISI 316L
BK8	Class 8	64080059	Steel with surface coating

Ⓢ Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Ⓜ Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."