

Fixings

Hexagonal Nut

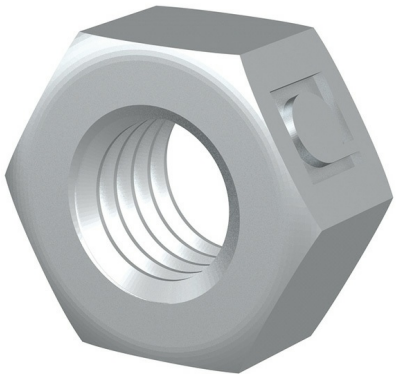

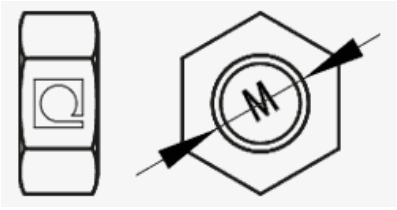

Description

Hexagonal metal nut that together with a bolt enables the fixing of joints, supports and channel structures for installations of trays, joints, flanges for supports and accessories. Available in M8 and M10. Made of steel and in various Protection Systems.

Advantages

Very versatile piece for use in any joint along with a M8 or M10 hexagonal set screw.

CE conformity to directive 2014/35 / EU.

Available in several protection systems: EZ, GC and AISI316L stainless steel.

Applications

Suitable for the fixing of joints, supports and channel structures in tray installations for the management of electrical cables and / or telecommunications in public buildings, infrastructures and civil works, industrial facilities and the tertiary sector.

Solutions

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Hexagonal Nut

Main technical characteristics

M10, M 8 | 100 | -50 / 150 °C | A1 No combustible | ETIM 10 EC003863

Product data

Ⓢ	Class IEC 61537		REF	kg/u	Ⓜ
EZ	Class 3	M10	67020079	0,010	Steel with surface coating
EZ	Class 3	M 8	67020095	0,005	Steel with surface coating
GC	Class 8	M10	67030014	0,011	Steel with surface coating
GC	Class 8	M 8	67030062	0,005	Steel with surface coating
INOX	Class 9D	M10	67060014	0,010	Acero inoxidable AISI 316L
INOX	Class 9D	M 8	67060062	0,005	Acero inoxidable AISI 316L

Ⓢ Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Ⓜ Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."