
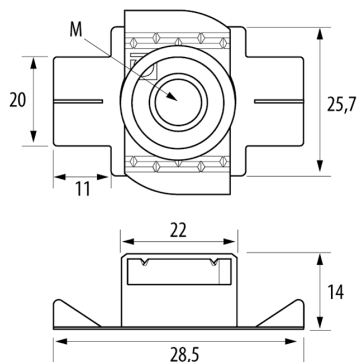


**Plan Channel Nut Safe&Fast** ( Ref: 81000481 )

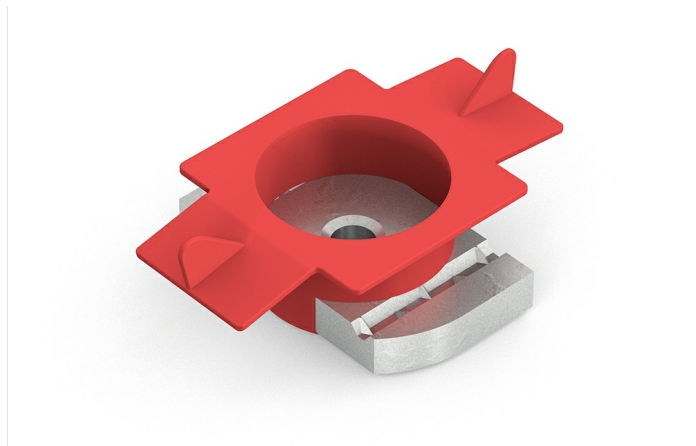

**Description**

M 8, M 8, With EZ protection system, EZ3 finish

**Advantages**

CE conformity to directive 2014/35 / EU.

Discover the innovation that makes installation easier and more efficient. With our exclusive plastic insert, twisting and positioning the piece on the channel or strut has never been easier. This design ensures a perfect and secure fit, saving time and effort with every installation.

Suitable for placing inside the channel, both for the fixing of channel accessories or brackets to it.

Use with hexagonal bolt M6, M8 or M10.

**Applications**

Suitable for the fixing of channel supports and structures for installations of Pemsaband® and Rejiband® metal trays in the management of electrical cables and / or telecommunications in public buildings, infrastructures and civil works, industrial installations and tertiary sector.

**Solutions**



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."






| Product data                          |  |                                |                            |
|---------------------------------------|--|--------------------------------|----------------------------|
| ETIM 10                               |  | EC000096                       |                            |
| Huella de CO2. GWP A1-A3 (kg CO2 eq.) |  |                                |                            |
| Protection System                     |  | EZ                             |                            |
| Finish                                |  | EZ3, Electrogalvanised         |                            |
| Resistance Class                      |  | Class 3                        |                            |
| Flange (mm)                           |  | 14                             |                            |
| M/PG                                  |  | M 8                            |                            |
|                                       |  | kg/u                           | 0,026                      |
|                                       |  | Material                       | Steel with surface coating |
|                                       |  | Working temperature range (°C) | -50 / 150 °C               |
|                                       |  | Fire resistance                | A1 No combustible          |

| 🔒 Protection System               |
|-----------------------------------|
| CU - Copper electroplated         |
| PG - Pregalvanised                |
| EZ - Electrogalvanised            |
| BC - Electrogalvanised Bichromate |
| BK8 - High Resistance Coating     |
| GC - Hot Dip Galvanising          |
| INOX - Stainless Steel            |
| PT - Polyester Paint              |
| AL - Aluminum                     |
| LN - Brass or Nickel-plated brass |

| 🧱 Insulating materials                    |
|-------------------------------------------|
| PC+ABS - Halogen Free Polycarbonate + ABS |
| PVC - Polyvinyl Chloride                  |
| PP - Halogen Free Polypropylene           |
| PA6 - Halogen Free Polyamide 6            |
| PA12 - Halogen Free Polyamide 12          |
| PU - Polyurethane                         |
| PE - Polyethylene                         |
| NBR - NBR rubber                          |
| PET - Thermoplastic Polyester             |
| TPV - Thermoplastic                       |

Product applications

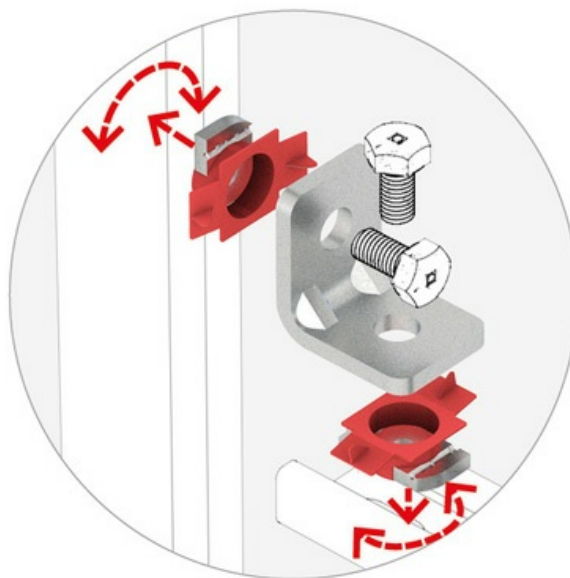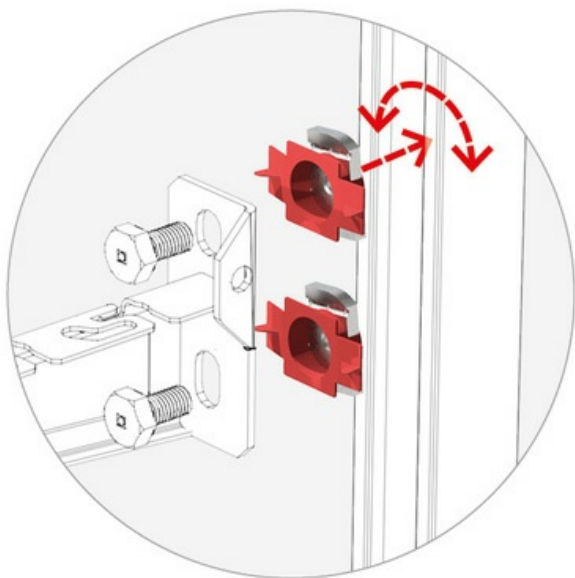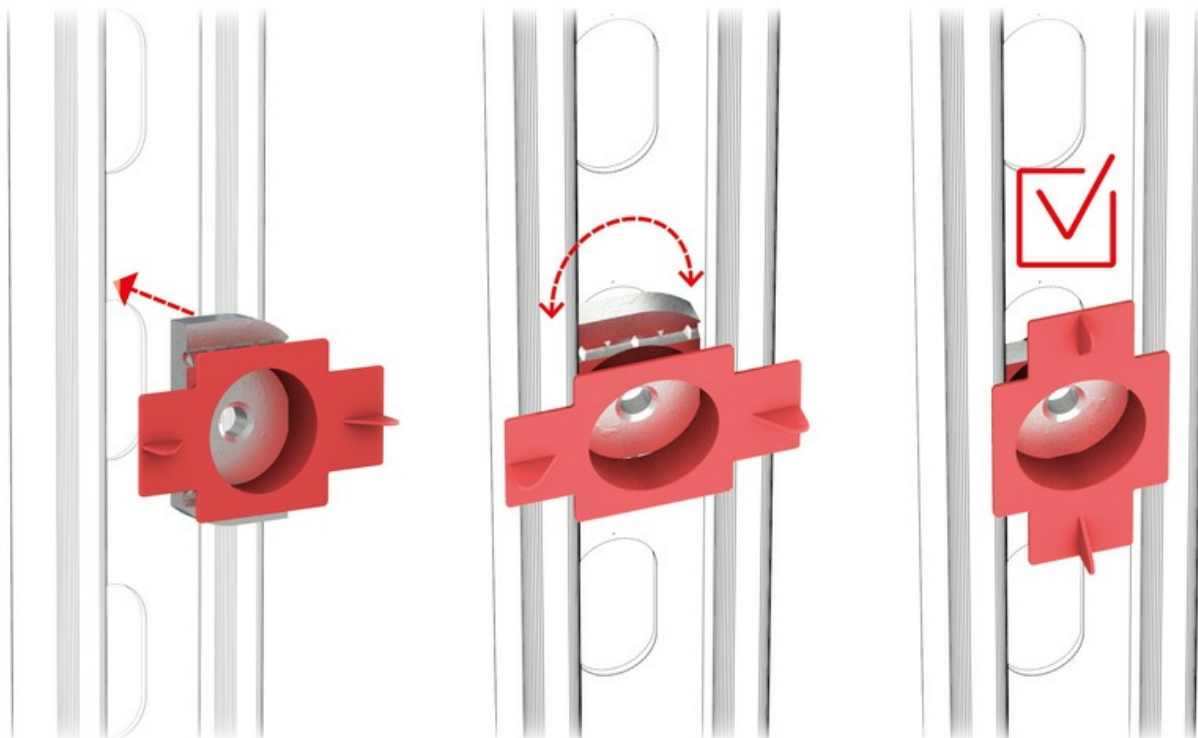

**Plan Channel Nut Safe&Fast** ( Ref: 81000481 )

