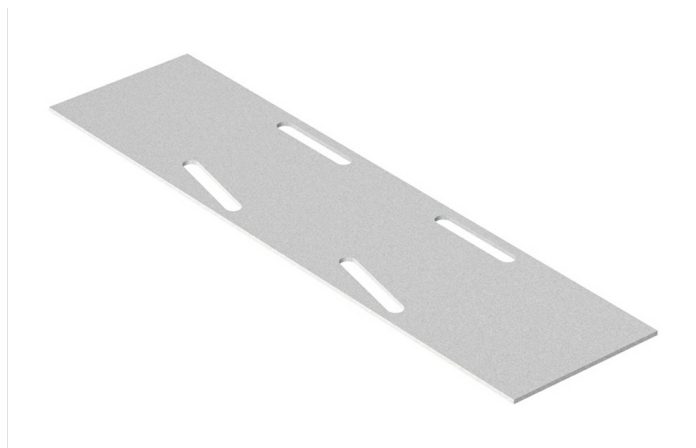


Description

Pemsaband® Central Tray Joint for widths of 300, 400, 500 and 600 mm that provides the necessary strength at the joint. Width 600 mm, HDG finish. Manufactured in steel and available in GC or PG Protection System and steel AISI 304 and AISI 316.

Advantages

Provides the necessary strength in the connections of large width trays so that there is no deformation in the joint.

Available in various protection systems: PG, GC, BK8, AZ+ and stainless steel AISI 304 and AISI 316L.

Electrical continuity guaranteed according to standard IEC61537.

Its unique design allows the attachment to the Pemsaband® sheet tray lengths by using a part in the base.

Applications

Suitable for joining straight lengths of Pemsaband® One perforated and Solid tray of widths 300-600 mm, for the Support, management and distribution of Electrical and/or telecommunications cables in public buildings, infrastructures and civil works, tertiary sector and industrial applications.

Solutions



Product data			
ETIM 10		EC002413	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		1,724	
Protection System		GC	
Finish		HDG, Hot Dip Galvanised	
Resistance Class		Class 5	
Width (mm)		600	
kg/u		0,666	
u		10	
Material		Steel with surface coating	
Working temperature range (°C)		-50 / 150 °C	
Fire resistance		A1 No combustible	

Ⓢ Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Ⓜ Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic

Product applications

