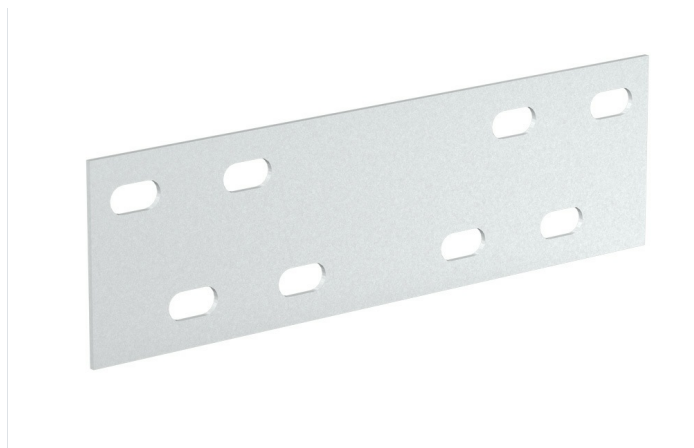


Description

Joint piece for straight sections and accessories of Nemaband® ladder. Fixing using M8 hexagonal bolts and nuts. Made from steel with GC Protection system.

Advantages

CE certified in compliance with the low voltage directive 2014/35 / EU

Available in 70, 100 and 150 height.

Very simple assembly by fixing the coupler to the Nemaband® cable ladder using M8 or M10 hexagonal screws and nuts.

GC Protection System. Hot dip Galvanised with 85 microns of thickness. Class 8 according to IEC 61537.

Applications

Suitable for joining straight sections and accessories of Nemaband® ladder for routing, protecting and distributing cables in electrical installations in industrial applications and large spans in: Oil & Gas and Petrochemical Industry, Power Plants, Electric Power Plants, etc. Water Treatment, Mining and Cement Offshore Platforms, Ports, Maritime Applications. Industrial projects in aggressive environments.

Solutions



Product data			
ETIM 10		EC002413	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		0,701	
Protection System		GC	
Finish		HDG, Hot Dip Galvanised	
Resistance Class		Class 7	
kg/u		0,271	
u		20	
Material		Steel with surface coating	
Working temperature range (°C)		-50 / 150 °C	
Fire resistance		A1 No combustible	

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic