


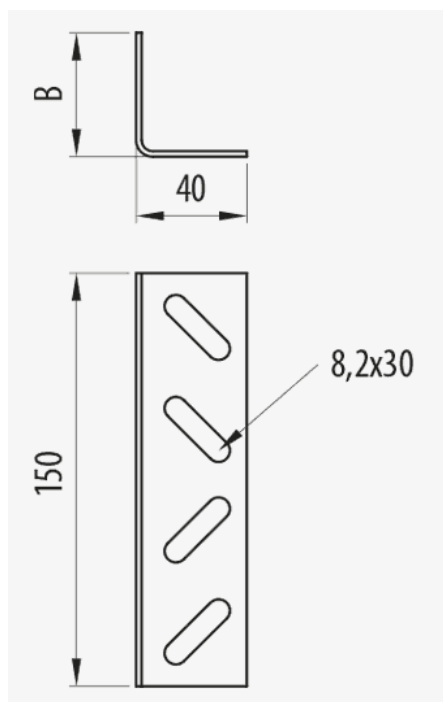

Description

Accessory for the joining of different sections of Pemsaband® PQW tray maintaining the guarantee of electrical continuity according to IEC61537 standard. Of 30 mm height. Suitable for Pemsaband® PQ trays of 15, 30, 50 or 60 mm in height. Approved according to REPSOL specifications. Made of steel and with GC Protection System.

Advantages

GC protection system (standard UNE-EN ISO 1461), suitable for outdoor installations and in aggressive environments. Corrosion resistance class 8 according to IEC 61537.

Electrical continuity guaranteed according to standard IEC61537.

Approved according to the REPSOL specification.

It allows the joining of different sections of Pemsaband PQW sheet metal tray.

Applications

Used for the joining of lengths and sections of Pemsaband® PQW trays, for the Support, management and distribution of cables in Petrochemical, Oil & Gas, Offshore, Civil works and Infrastructures, as well as in tunnels and installation galleries.

Solutions



Product data			
ETIM 10		EC002413	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		0,345	
Protection System		GC	
Finish		HDG, Hot Dip Galvanised	
Resistance Class		Class 8	
Flange (mm)		30	
kg/u		0,133	
u		10	
Material		Steel with surface coating	
Working temperature range (°C)		-50 / 150 °C	
Fire resistance		A1 No combustible	

Ⓢ Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Ⓜ Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic