

PQ Joint (Ref: 70293011)

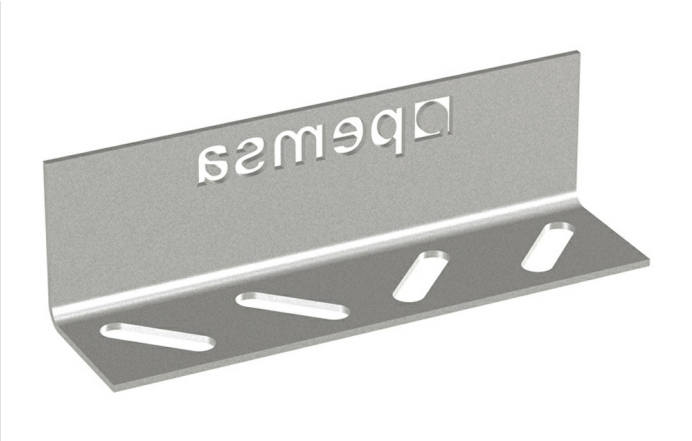

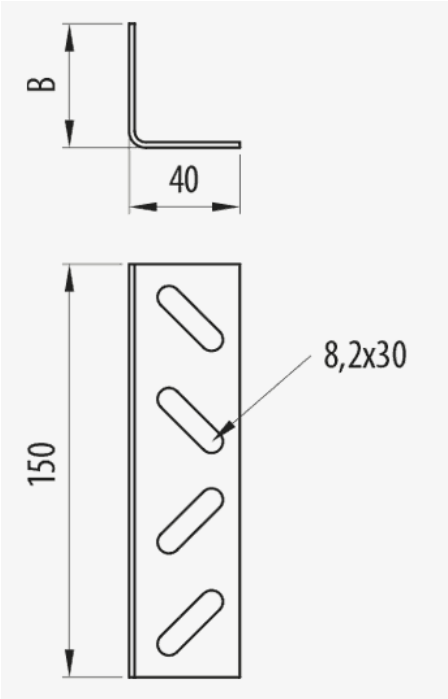

Description

Accessory for the joining of different sections of Pemsaband® PQW tray maintaining the guarantee of electrical continuity according to IEC61537 standard. Of 30 mm height. Suitable for Pemsaband® PQ trays of 15, 30, 50 or 60 mm in height. Approved according to REPSOL specifications. Made of steel and with GC Protection System.

Advantages

GC protection system (standard UNE-EN ISO 1461), suitable for outdoor installations and in aggressive environments. Corrosion resistance class 8 according to IEC 61537.

Electrical continuity guaranteed according to standard IEC61537.

Approved according to the REPSOL specification.

It allows the joining of different sections of Pemsaband PQW sheet metal tray.

Applications

Used for the joining of lengths and sections of Pemsaband® PQW trays,for the Support, management and distribution of cables in Petrochemical, Oil & Gas, Offshore, Civil works and Infrastructures, as well as in tunnels and installation galleries.

Solutions

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

PQ Joint (Ref: 70293011)

Product data

ETIM 10	EC002413	**u**	10
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	0,345	**Material**	Steel with surface coating
Protection System	GC	**Working temperature range (°C)**	-50 / 150 ºC
Finish	HDG, Hot Dip Galvanised	**Fire resistance**	A1 No combustible
Resistance Class	Class 8		
Flange (mm)	30		
kg/u	0,133		

Ⓢ Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Ⓜ Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."