

PQ Joint (Ref: 70293011)

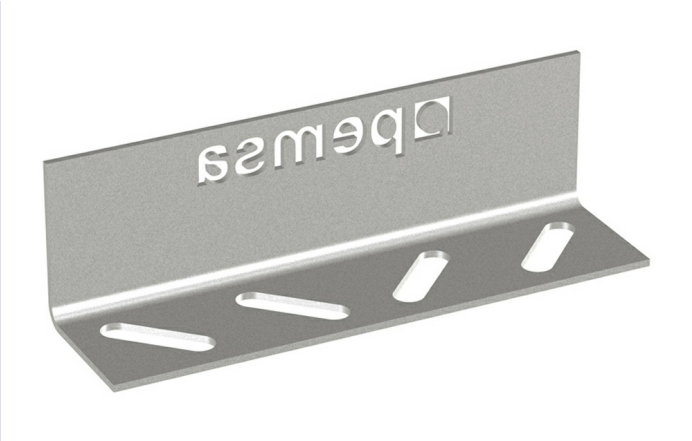

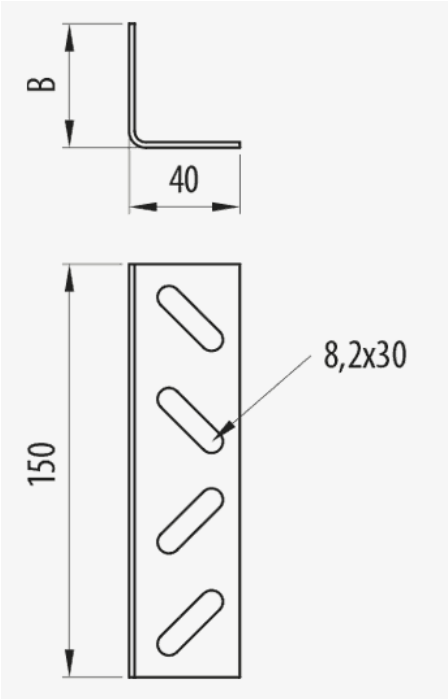

Description

Accessory for the joining of different sections of Pemsaband® PQW tray maintaining the guarantee of electrical continuity according to IEC61537 standard. Of 30 mm height. Suitable for Pemsaband® PQ trays of 15, 30, 50 or 60 mm in height. Approved according to REPSOL specifications. Made of steel and with GC Protection System.

Advantages

GC protection system (standard UNE-EN ISO 1461), suitable for outdoor installations and in aggressive environments. Corrosion resistance class 8 according to IEC 61537.

Electrical continuity guaranteed according to standard IEC61537.

Approved according to the REPSOL specification.

It allows the joining of different sections of Pemsaband®PQW sheet metal tray.

Applications

Used for the joining of lengths and sections of Pemsaband® PQW trays,for the Support, management and distribution of cables in Petrochemical, Oil & Gas, Offshore, Civil works and Infrastructures, as well as in tunnels and installation galleries.

Solutions

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

PQ Joint (Ref: 70293011)

Product data

ETIM 10	EC002413	**u**	10
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		**Material**	Steel with surface coating
Protection System	GC	**Working temperature range (°C)**	-50 / 150 ºC
Finish	HDG, Hot Dip Galvanised	**Fire resistance**	A1 No combustible
Resistance Class	Class 8		
Flange (mm)	30		
kg/u	0,133		

Ⓢ Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Ⓜ Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."