


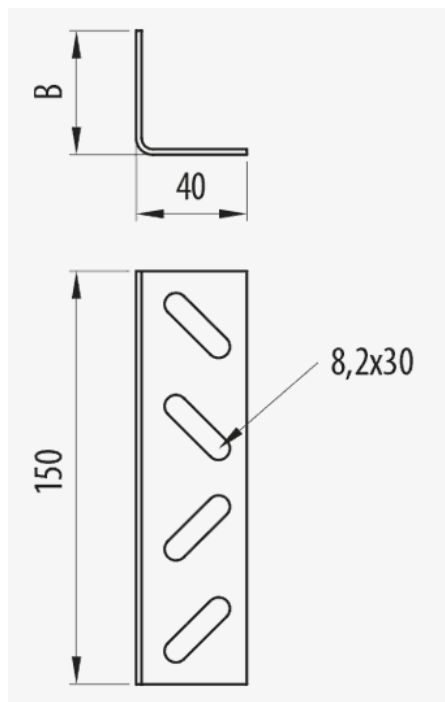

Description

Accessory for the joining of different sections of Pemsaband® PQW tray maintaining the guarantee of electrical continuity according to IEC61537 standard. Of 100 mm height. Suitable for Pemsaband® PQ trays of 15, 30, 50 or 60 mm in height. Approved according to REPSOL specifications. Made of steel and with GC Protection System.

Advantages

GC protection system (standard UNE-EN ISO 1461), suitable for outdoor installations and in aggressive environments. Corrosion resistance class 8 according to IEC 61537.

Electrical continuity guaranteed according to standard IEC61537.

Approved according to the REPSOL specification.

It allows the joining of different sections of Pemsaband PQW sheet metal tray.

Applications

Used for the joining of lengths and sections of Pemsaband® PQW trays, for the Support, management and distribution of cables in Petrochemical, Oil & Gas, Offshore, Civil works and Infrastructures, as well as in tunnels and installation galleries.

Solutions



Product data

ETIM 10	EC002413	u	10
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	0,708	Material	Steel with surface coating
Protection System	GC	Working temperature range (°C)	-50 / 150 °C
Finish	HDG, Hot Dip Galvanised	Fire resistance	A1 No combustible
Resistance Class	Class 8		
Flange (mm)	100		
kg/u	0,273		

Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic