
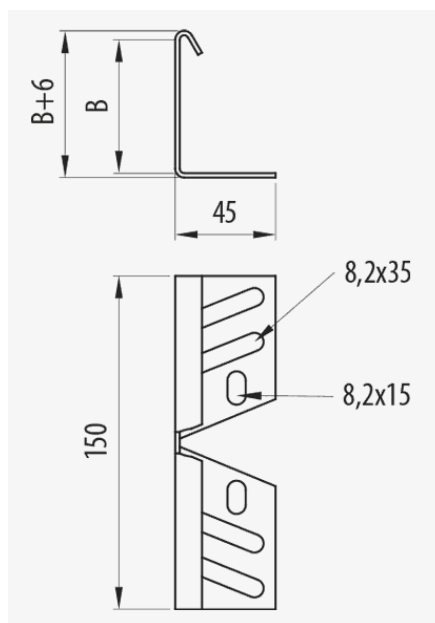


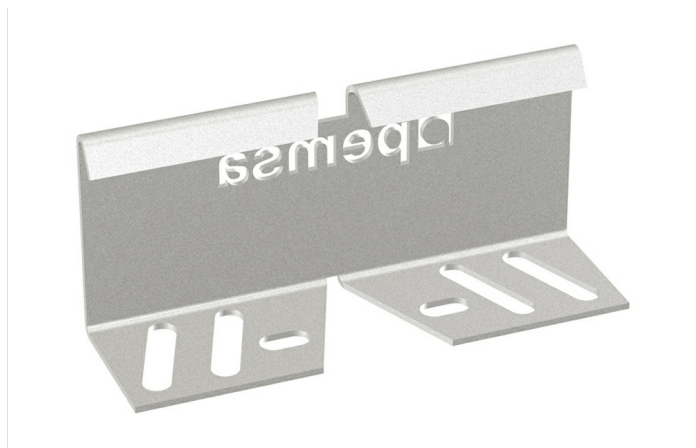

Description

Accessory for the joining of different sections of Pemsaband® PQU tray maintaining the guarantee of electrical continuity according to IEC61537 standard. Suitable for Pemsaband® PQU trays of 15, 30, 50 or 60 mm in height. Approved according to CEPSA specifications. Made of steel and with GC Protection System 85 microns thick, suitable for outdoor installations and aggressive environments.

Advantages

It allows the joining of different sections of Pemsaband PQ sheet metal tray.

Approved by CEPSA.

Electrical continuity guaranteed according to standard IEC61537.

GC protection system (standard UNE-EN ISO 1461), suitable for outdoor installations and in aggressive environments. Corrosion resistance class 8 according to IEC 61537.

Applications

Used for the joining of lengths and sections of Pemsaband® PQ trays, for the Support, management and distribution of cables in Petrochemical, Oil & Gas, Offshore, Civil works and Infrastructures, as well as in tunnels and installation galleries.

Solutions



Main technical characteristics

 GC	 Class 8	 15, 30, 50, 60	 10	 Steel with surface coating	 -50 / 150 °C	 A1 No combustible
ETIM 10						
EC002413						

Product data

	Ref	kg/u
15	70293000	0,150
30	70293001	0,183
50	70293002	0,233
60	70293003	0,258

 Protection System

- CU** - Copper electroplated
- PG** - Pregalvanised
- EZ** - Electrogalvanised
- BC** - Electrogalvanised Bichromate
- BK8** - High Resistance Coating
- GC** - Hot Dip Galvanising
- INOX** - Stainless Steel
- PT** - Polyester Paint
- AL** - Aluminum
- LN** - Brass or Nickel-plated brass

 Insulating materials

- PC+ABS** - Halogen Free Polycarbonate + ABS
- PVC** - Polyvinyl Chloride
- PP** - Halogen Free Polypropylene
- PA6** - Halogen Free Polyamide 6
- PA12** - Halogen Free Polyamide 12
- PU** - Polyurethane
- PE** - Polyethylene
- NBR** - NBR rubber
- PET** - Thermoplastic Polyester
- TPV** - Thermoplastic