

# PQU Joint ( Ref: 70293000 )

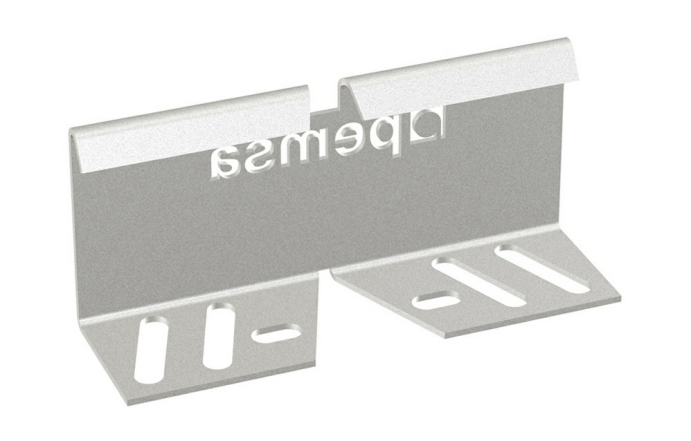

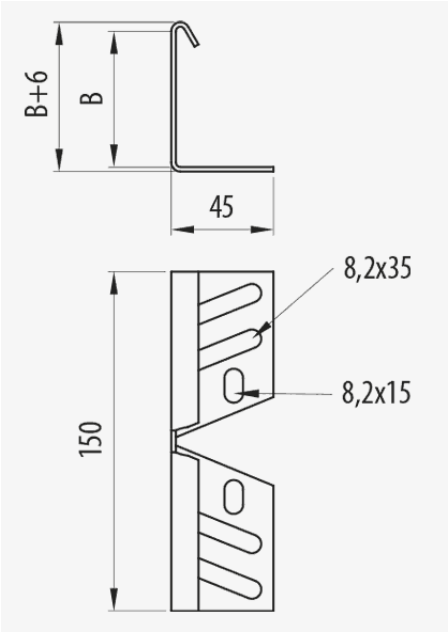


## Description

Accessory for the joining of different sections of Pemsaband® PQU tray maintaining the guarantee of electrical continuity according to IEC61537 standard. Of 15 mm height. maintaining the guarantee of electrical continuity according to IEC61537 standard. Suitable for Pemsaband® PQU trays of 15, 30, 50 or 60 mm in height. Approved according to CEPSA specifications. Made of steel and with GC Protection System 85 microns thick, suitable for outdoor installations and aggressive environments.

## Advantages

GC protection system (standard UNE-EN ISO 1461), suitable for outdoor installations and in aggressive environments. Corrosion resistance class 8 according to IEC 61537.

Electrical continuity guaranteed according to standard IEC61537.

Approved by CEPSA.

It allows the joining of different sections of Pemsaband PQ sheet metal tray.

## Applications

Used for the joining of lengths and sections of Pemsaband® PQ trays,for the Support, management and distribution of cables in Petrochemical, Oil & Gas, Offshore, Civil works and Infrastructures, as well as in tunnels and installation galleries.

## Solutions



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

# PQU Joint ( Ref: 70293000 )

## Product data

| | | | |
|---|---|---|---|
| **ETIM 10** | EC002413 | **u** | 10 |
| **Huella de CO2. GWP A1-A3 (kg CO2 eq.)** | | **Material** | Steel with surface coating |
| **Protection System** | GC | **Working temperature range (°C)** | -50 / 150 ºC |
| **Finish** | HDG, Hot Dip Galvanised | **Fire resistance** | A1 No combustible |
| **Resistance Class** | Class 8 | | |
| **Flange (mm)** | 15 | | |
| **kg/u** | 0,150 | | |

## Ⓢ Protection System

**CU** - Copper electroplated

**PG** - Pregalvanised

**EZ** - Electrogalvanised

**BC** - Electrogalvanised Bichromate

**BK8** - High Resistance Coating

**GC** - Hot Dip Galvanising

**INOX** - Stainless Steel

**PT** - Polyester Paint

**AL** - Aluminum

**LN** - Brass or Nickel-plated brass

## Ⓜ Insulating materials

**PC+ABS** - Halogen Free Polycarbonate + ABS

**PVC** - Polyvinyl Chloride

**PP** - Halogen Free Polypropylene

**PA6** - Halogen Free Polyamide 6

**PA12** - Halogen Free Polyamide 12

**PU** - Polyurethane

**PE** - Polyethylene

**NBR** - NBR rubber

**PET** - Thermoplastic Polyester

**TPV** - Thermoplastic



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."