


PQ AL Joints and Fixings

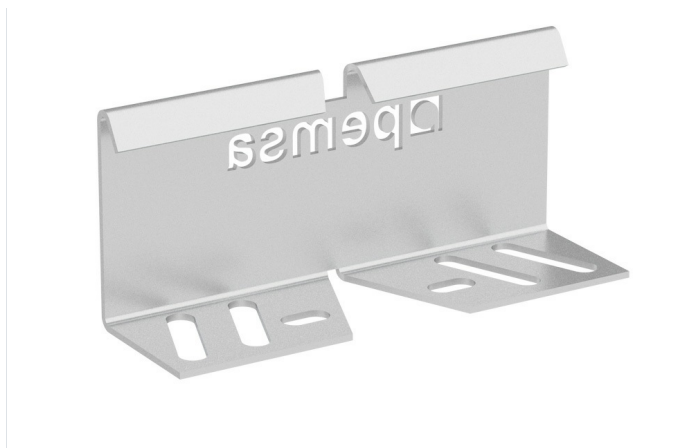

Description

Accessory for joining different sections of Pemsaband® PQU AL trays. Comprised of bolt, nut and washer and approved according to technical specifications of CEPSA® ESP-2208-5. Made from Aluminium alloy 1050H24.

Advantages

It allows the coupling of straight sections of Pemsaband® PQU AL cable tray

Joint kit consisting of screw and nut with stainless steel washer, suitable for aluminum installations.

Suitable for joining straight sections and any accessory from the Pemsaband® PQU AL range.

Electrical continuity guaranteed according to standard IEC61537.

Made of Aluminum alloy 1050H24.

CEPSA product approval. Designed according to ESP-2208-5 specification.

Applications

Suitable for fixing Rejiband® trays to supports for cable management in electrical and telecommunications installations, industrial installations, infrastructure and civil works and the service sector.

Solutions



Main technical characteristics

Ⓢ AL	30, 60, 50	10	Ⓜ Aluminum	🔥 -50 / 150 °C	🔥 A1 No combustible	ETIM 10 EC002413
------	------------	----	------------	----------------	---------------------	---------------------

Product data

Ⓢ	Ref	kg/u
30	82002289	0,061
60	82002290	0,085
50	82003360	0,077

Ⓢ Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Ⓜ Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic