


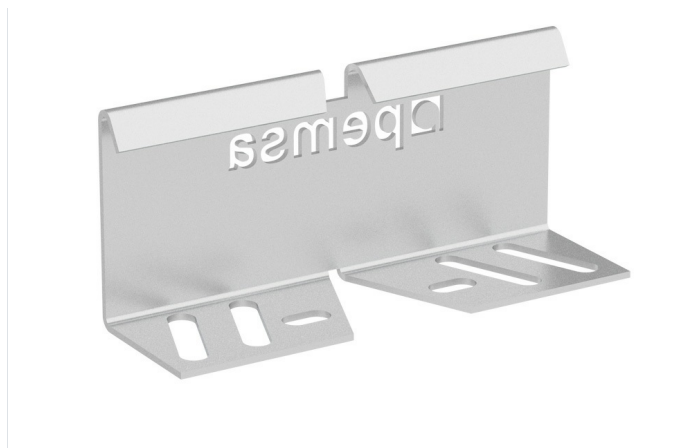

Description

Accessory for joining different sections of Pemsaband® PQU AL trays. Of 60 mm height, With AL protection system. Comprised of bolt, nut and washer and approved according to technical specifications of CEPSA® ESP-2208-5. Made from Aluminium alloy 1050H24.

Advantages

Made of Aluminum alloy 1050H24.

Electrical continuity guaranteed according to standard IEC61537.

Joint kit consisting of screw and nut with stainless steel washer, suitable for aluminum installations.

It allows the coupling of straight sections of Pemsaband® PQU AL cable tray

Suitable for joining straight sections and any accessory from the Pemsaband® PQU AL range.

Applications

Suitable for fixing Rejiband® trays to supports for cable management in electrical and telecommunications installations, industrial installations, infrastructure and civil works and the service sector.

Solutions



Product data			
ETIM 10	EC002413	u	10
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		Material	Aluminum
Protection System	AL	Working temperature range (°C)	-50 / 150 °C
Finish	1050H24 Aluminium	Fire resistance	A1 No combustible
Flange (mm)	60		
kg/u	0,085		

Protection System

CU

- Copper electroplated

PG

- Pregalvanised

EZ

- Electrogalvanised

BC

- Electrogalvanised Bichromate

BK8

- High Resistance Coating

GC

- Hot Dip Galvanising

INOX

- Stainless Steel

PT

- Polyester Paint

AL

- Aluminum

LN

- Brass or Nickel-plated brass

Insulating materials

PC+ABS

- Halogen Free Polycarbonate + ABS

PVC

- Polyvinyl Chloride

PP

- Halogen Free Polypropylene

PA6

- Halogen Free Polyamide 6

PA12

- Halogen Free Polyamide 12

PU

- Polyurethane

PE

- Polyethylene

NBR

- NBR rubber

PET

- Thermoplastic Polyester

TPV

- Thermoplastic