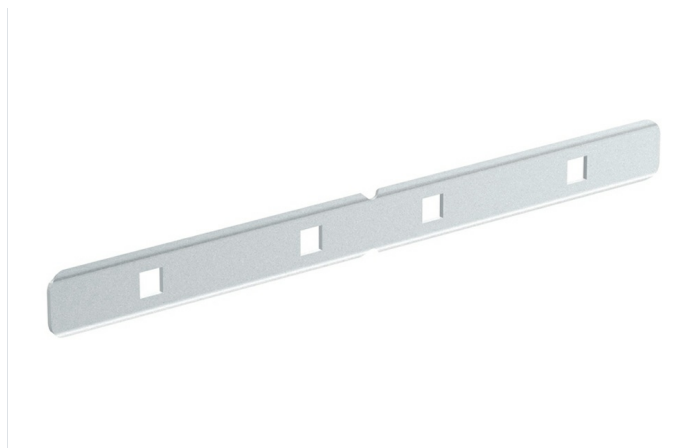


Description

Connector for joining straight sections of solid or perforated Pemsaband® tray in heights of 35, 60 and 100 mm. It is necessary to use 2 connectors, one on each side of the tray. Available in GC and PG Protection Systems.

Advantages

Suitable for the joining of different lengths of Pemsaband® One perforated and solid trays of heights 35, 60 and 100 mm.

Also used to join mitred sections to form angles.

Electrical continuity guaranteed according to standard IEC61537.

Available in protection systems: PG, pre-galvanized and GC, hot-dip galvanized

Applications

Suitable for joining straight lengths of Pemsaband® One perforated, solid and RX tray for the Support, management and distribution of Electrical and/or telecommunications cables in public buildings, infrastructures and civil works, tertiary sector and industrial applications.

Solutions



Main technical characteristics

 35, 60	 50	 Steel with surface coating	 -50 / 150 °C	 A1 No combustible	ETIM 10 EC002413
--	--	--	--	---	---------------------

Product data

			Ref	kg/u
PG	Class 3	35	71021005	0,039
PG	Class 3	60	71022005	0,101
GC	Class 5	35	71031005	0,041

 Protection System

- CU** - Copper electroplated
- PG** - Pregalvanised
- EZ** - Electrogalvanised
- BC** - Electrogalvanised Bichromate
- BK8** - High Resistance Coating
- GC** - Hot Dip Galvanising
- INOX** - Stainless Steel
- PT** - Polyester Paint
- AL** - Aluminum
- LN** - Brass or Nickel-plated brass

 Insulating materials

- PC+ABS** - Halogen Free Polycarbonate + ABS
- PVC** - Polyvinyl Chloride
- PP** - Halogen Free Polypropylene
- PA6** - Halogen Free Polyamide 6
- PA12** - Halogen Free Polyamide 12
- PU** - Polyurethane
- PE** - Polyethylene
- NBR** - NBR rubber
- PET** - Thermoplastic Polyester
- TPV** - Thermoplastic



Product applications

