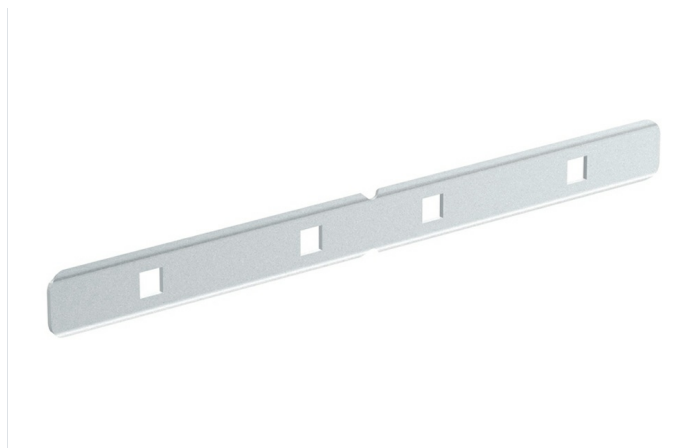


Description

Connector for joining straight sections of solid or perforated Pemsaband® tray in heights of 35, 60 and 100 mm. Of 60 mm height. It is necessary to use 2 connectors, one on each side of the tray. Available in GC and PG Protection Systems.

Advantages

Available in protection systems: PG, pre-galvanized and GC, hot-dip galvanized

Electrical continuity guaranteed according to standard IEC61537.

Suitable for the joining of different lengths of Pemsaband® One perforated and solid trays of heights 35, 60 and 100 mm.

Also used to join mitred sections to form angles.

Applications

Suitable for joining straight lengths of Pemsaband® One perforated, solid and RX tray for the Support, management and distribution of Electrical and/or telecommunications cables in public buildings, infrastructures and civil works, tertiary sector and industrial applications.

Solutions



ETIM 10	EC002413	u	50
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	0,327	Material	Steel with surface coating
Protection System	PG	Working temperature range (°C)	-50 / 150 °C
Finish	PG3, Pregalvanised	Fire resistance	A1 No combustible
Resistance Class	Class 3		
Flange (mm)	60		
kg/u	0,101		

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic



Product applications

