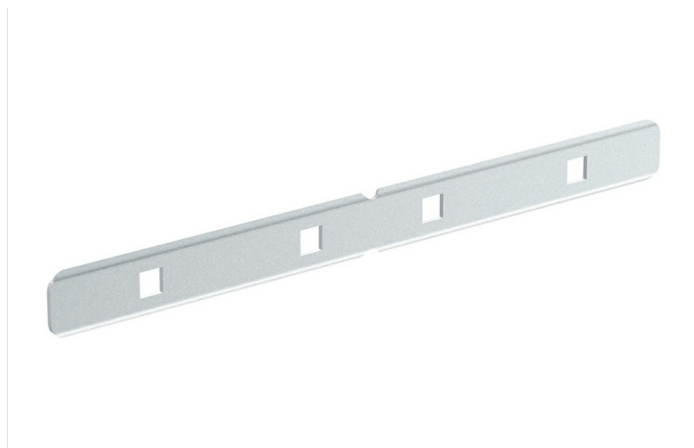


### Description

Connector for joining straight sections of solid or perforated Pemsaband® tray in heights of 35, 60 and 100 mm. Of 35 mm height. It is necessary to use 2 connectors, one on each side of the tray. Available in GC and PG Protection Systems.

### Advantages

Available in protection systems: PG, pre-galvanized and GC, hot-dip galvanized

Electrical continuity guaranteed according to standard IEC61537.

Suitable for the joining of different lengths of Pemsaband® One perforated and solid trays of heights 35, 60 and 100 mm.

Also used to join mitred sections to form angles.

### Applications

Suitable for joining straight lengths of Pemsaband® One perforated, solid and RX tray for the Support, management and distribution of Electrical and/or telecommunications cables in public buildings, infrastructures and civil works, tertiary sector and industrial applications.

### Solutions



| Product data                          |  |                            |  |
|---------------------------------------|--|----------------------------|--|
| ETIM 10                               |  | EC002413                   |  |
| Huella de CO2. GWP A1-A3 (kg CO2 eq.) |  | 0,106                      |  |
| Protection System                     |  | GC                         |  |
| Finish                                |  | HDG, Hot Dip Galvanised    |  |
| Resistance Class                      |  | Class 5                    |  |
| Flange (mm)                           |  | 35                         |  |
| kg/u                                  |  | 0,041                      |  |
| u                                     |  | 50                         |  |
| Material                              |  | Steel with surface coating |  |
| Working temperature range (°C)        |  | -50 / 150 °C               |  |
| Fire resistance                       |  | A1 No combustible          |  |

| 🔒 Protection System               |
|-----------------------------------|
| CU - Copper electroplated         |
| PG - Pregalvanised                |
| EZ - Electrogalvanised            |
| BC - Electrogalvanised Bichromate |
| BK8 - High Resistance Coating     |
| GC - Hot Dip Galvanising          |
| INOX - Stainless Steel            |
| PT - Polyester Paint              |
| AL - Aluminum                     |
| LN - Brass or Nickel-plated brass |

| 🏠 Insulating materials                    |
|-------------------------------------------|
| PC+ABS - Halogen Free Polycarbonate + ABS |
| PVC - Polyvinyl Chloride                  |
| PP - Halogen Free Polypropylene           |
| PA6 - Halogen Free Polyamide 6            |
| PA12 - Halogen Free Polyamide 12          |
| PU - Polyurethane                         |
| PE - Polyethylene                         |
| NBR - NBR rubber                          |
| PET - Thermoplastic Polyester             |
| TPV - Thermoplastic                       |

## Product applications

