


Pemsaband/Megaband Coupler (Ref: 93950002)

1/8

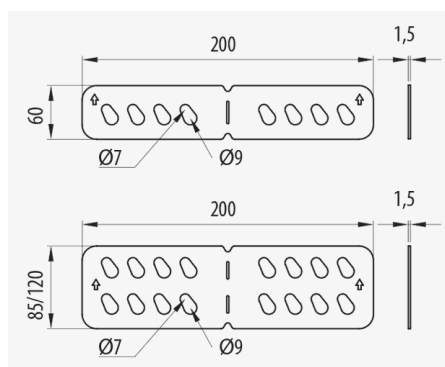

Description

Coupling piece for joining straight sections and accessories of Megaband® ladder by using M8 hexagonal nuts and bolts. Of 60 mm height, With INOX protection system, I304 finish. Suitable for Megaband® ladder of 60,100, 120 and 150mm height, maintaining electrical continuity, according to IEC 61537. Made of steel, available in different Protection Systems.

Advantages

Suitable for Megaband® ladder, heights 85, 100 and 120 mm.

Wide variety of sizes, protection systems and accessories to adapt to the requirements of each electrical installation.

Electrical continuity guaranteed according to standard IEC61537.

Very simple assembly by fixing the coupler to the Megaband® ladder by means of M8 hexagonal nuts and bolts.

Only necessary if straight sections are cut since the Megaband ladder has an integrated coupling system.

Applications

Suitable for the joining of straight sections and accessories of the Megaband ladder for the management of cables in electrical and telecommunication installations in public buildings, infrastructures and civil works, industrial installations, tertiary sector.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Product data			
ETIM 10		EC002413	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		0,399	
Protection System		INOX	
Finish		Stainless Steel AISI 304	
Resistance Class		Class 9C	
Flange (mm)		60	
kg/u		0,075	
u		50	
Material		Stainless steel AISI 304	
Working temperature range (°C)		-50 / 150 °C	
Fire resistance		A1 No combustible	

🔒 Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

🔒 Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic

Product applications

