


Pemsaband/Megaband Coupler (Ref: 93960002)

1/8

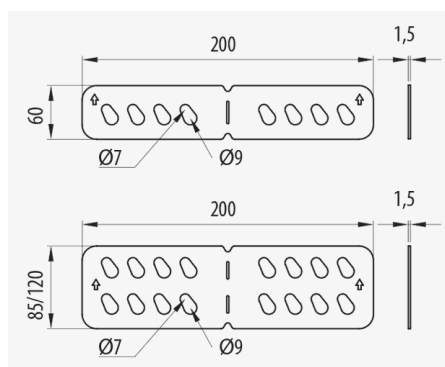

Description

Coupling piece for joining straight sections and accessories of Megaband® ladder by using M8 hexagonal nuts and bolts. Of 60 mm height, With INOX protection system, I316L finish. Suitable for Megaband® ladder of 60,100, 120 and 150mm height, maintaining electrical continuity, according to IEC 61537. Made of steel, available in different Protection Systems.

Advantages

Suitable for Megaband® ladder, heights 85, 100 and 120 mm.

Wide variety of sizes, protection systems and accessories to adapt to the requirements of each electrical installation.

Electrical continuity guaranteed according to standard IEC61537.

Very simple assembly by fixing the coupler to the Megaband® ladder by means of M8 hexagonal nuts and bolts.

Only necessary if straight sections are cut since the Megaband ladder has an integrated coupling system.

Applications

Suitable for the joining of straight sections and accessories of the Megaband ladder for the management of cables in electrical and telecommunication installations in public buildings, infrastructures and civil works, industrial installations, tertiary sector.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Product data

ETIM 10	EC002413	u	50
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	0,399	Material	Acero inoxidable AISI 316L
Protection System	INOX	Working temperature range (°C)	-50 / 150 °C
Finish	Stainless Steel AISI 316L	Fire resistance	A1 No combustible
Resistance Class	Class 9D		
Flange (mm)	60		
kg/u	0,075		

Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic

Product applications

