


Reinforced Joint Clamp (Ref: 64060061)

1/3

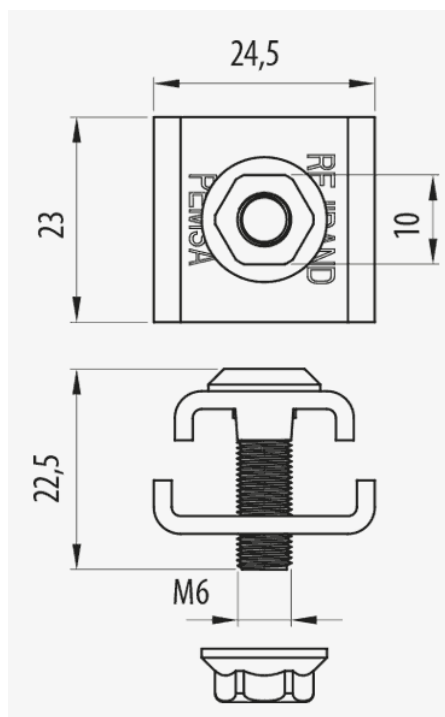

Description

Steel component for joining sections of Rejiband trays consisting of a captive screw, connecting plate and a nut. With INOX protection system, I316L finish. Thanks to its construction, it greatly simplifies the joint between sections and ensures the greater mechanical strength of the joint between trays, optimizing the possible maximum load values. It is available in various Protection Systems.

Advantages

Available in different protection systems: EZ, BK8, GC, and stainless steel AISI 316.

N Mark of Aenor, UL Certificate, Certificate IECC CB according to IEC 61537.

Greater mechanical strength of the section joints.

E90 fire resistance (90 minutes, 1000°C) according to DIN 4102-12.

Simplification of the joint assembly between different sections.

Applications

Suitable for the joining of sections of Rejiband trays for electrical and/or telecommunications installations in: Civil Works, Tunnels, Car Parks, Public Buildings, Shopping Centres, Major Infrastructures, Airports, Underground and Railway, Tertiary sector and industrial applications: Naval, Petrochemical, Textile, Chemical and Food.

Solutions



FOOD INDUSTRY



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Reinforced Joint Clamp (Ref: 64060061)

Product data

ETIM 10	EC002413	u	50
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		Material	Acero inoxidable AISI 316L
Protection System	INOX	Working temperature range (°C)	-50 / 150 °C
Finish	Stainless Steel AISI 316L	Fire resistance	E90 (90 min. 1000°C)
Resistance Class	Class 9D		
kg/u	0,029		

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

® Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Reijband, Pemsaband, Inducanal, Reijtech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Product applications

