
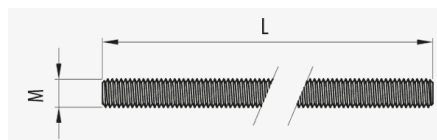


Threaded Rod

1/5

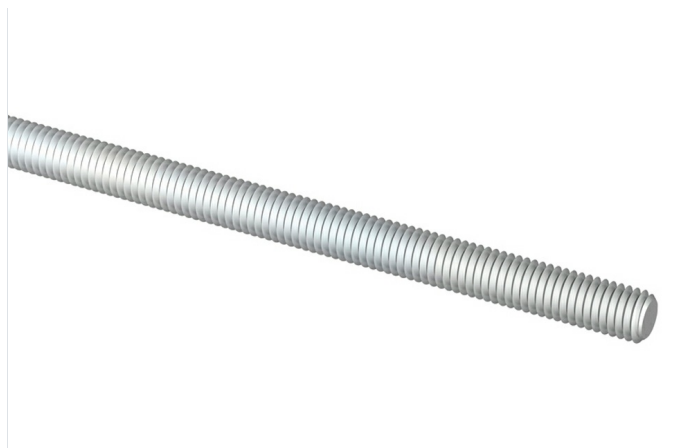

Description

Advantages

Applications

Solutions



INDUSTRIA ALIMENTARIA



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Threaded Rod

Main technical characteristics

 M 6, M 8, M10	 -50 / 150 °C	ETIM EC001003
---	--	------------------

Product data

Ⓢ	Class	Ⓜ	L (mm)	Ref	kg/u	Ⓜ	Ⓜ	IF	Ⓢ
EZ	Class 3	M 6	500	67010140	0.120	50	Steel with surface coating	195	A1 No combustible
EZ	Class 3	M 6	1000	67010141	0.240	50	Steel with surface coating	195	A1 No combustible
BC	Class 5	M 8	500	67020044	0.160	50	Steel with surface coating	400	E90 (90 min. 1000°C)
BC	Class 5	M 8	1000	67020045	0.320	50	Steel with surface coating	400	E90 (90 min. 1000°C)
BC	Class 5	M 6	500	67020140	0.120	50	Steel with surface coating	195	A1 No combustible
BC	Class 5	M 6	1000	67020141	0.240	50	Steel with surface coating	195	A1 No combustible
BC	Class 5	M10	1000	67020145	0.490	50	Steel with surface coating	500	E90 (90 min. 1000°C)
GC	Class 8	M 8	1000	67030045	0.320	50	Steel with surface coating	400	E90 (90 min. 1000°C)
INOX	Class 9D	M 8	500	67060044	0.160	50	Acero inoxidable AISI 316L	400	E90 (90 min. 1000°C)
INOX	Class 9D	M 8	1000	67060045	0.320	50	Acero inoxidable AISI 316L	400	E90 (90 min. 1000°C)
INOX	Class 9D	M 6	1000	67060141	0.240	50	Acero inoxidable AISI 316L	195	A1 No combustible
INOX	Class 9D	M10	1000	67060145	0.490	25	Acero inoxidable AISI 316L	500	E90 (90 min. 1000°C)
BK8	Class 8	M 8	1000	67080045	0.320	50	Steel with surface coating	400	E90 (90 min. 1000°C)
EZ	Class 2	M 8	500	81000440	0.161	50	Steel with surface coating	400	E90 (90 min. 1000°C)
EZ	Class 2	M 8	1000	81000441	0.321	50	Steel with surface coating	400	E90 (90 min. 1000°C)
EZ	Class 2	M10	1000	81000442	0.491	50	Steel with surface coating	500	E90 (90 min. 1000°C)
CU	Class 1	M 8	1000	82003296	0.320	50	Steel with surface coating	400	A1 No combustible

Ⓢ Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Ⓜ Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Threaded Rod

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic



Threaded Rod

4/5

Load diagrams

□

Product applications

