
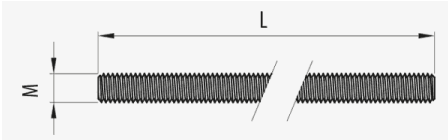


Threaded Rod (Ref: 67010141)

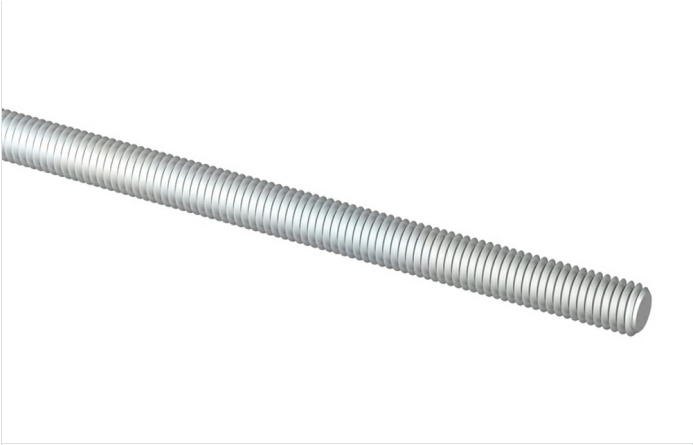

Description

M 6, M 6, M 6x1000 mm, With EZ protection system, EZ3 finish

Advantages

Applications

Solutions



Product data

ETIM 10	EC000028	u	50
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		Material	Steel with surface coating
Protection System	EZ	F (kg)	195
Finish	EZ3, Electrogalvanised	Working temperature range (°C)	-50 / 150 °C
Resistance Class	Class 3	Fire resistance	A1 No combustible
M/PG	M 6		
L (mm)	1000		
kg/u	0,240		

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene


NBR - NBR rubber

PET - Thermoplastic Polyester


TPV - Thermoplastic



Load diagrams

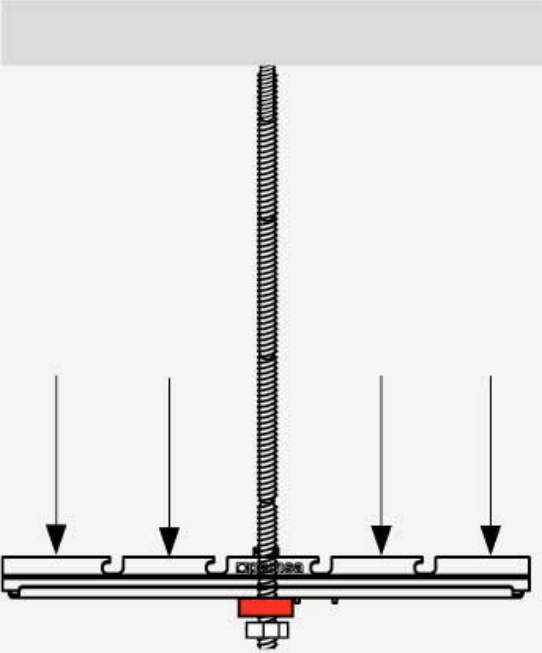↓CTA↓ (kg)	◀▶	kg
una varilla / one rod / uma varão		
	100-300	160

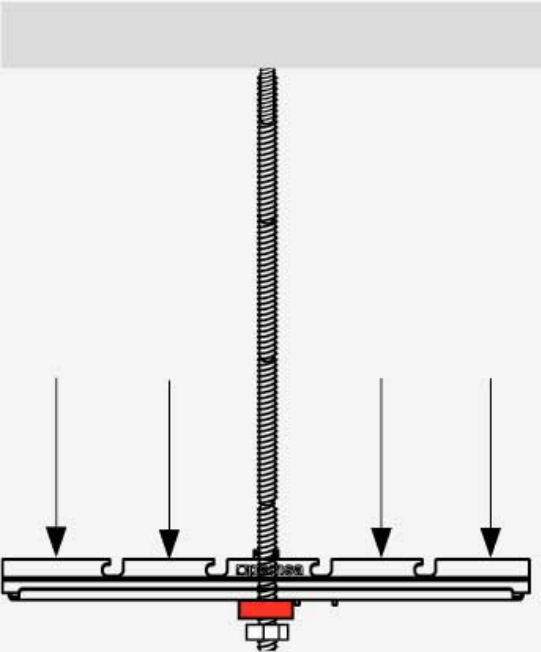

↓CTA↓ (kg)		kg
una varilla / one rod / uma varão		
	100-300	160

Product applications



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



