
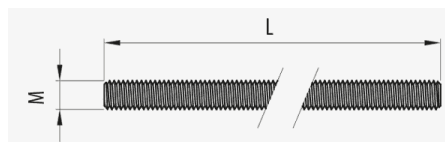


Threaded Rod (Ref: 67060141)

1/8

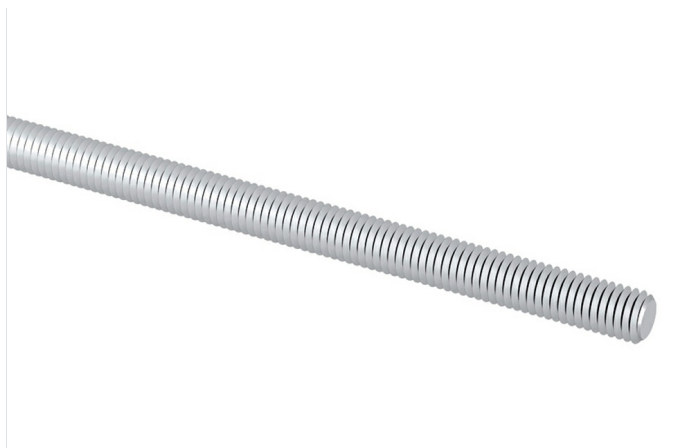

Description

M 6, M 6, M 6x1000 mm, With INOX protection system, I316L finish

Advantages

Applications

Solutions



FOOD INDUSTRY



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Product data

ETIM 10	EC000028	u	50
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		Material	Acero inoxidable AISI 316L
Protection System	INOX	F (kg)	195
Finish	Stainless Steel AISI 316L	Working temperature range (°C)	-50 / 150 °C
Resistance Class	Class 9D	Fire resistance	A1 No combustible
M/PG	M 6		
L (mm)	1000		
kg/u	0,240		

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene


NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic




Load diagrams

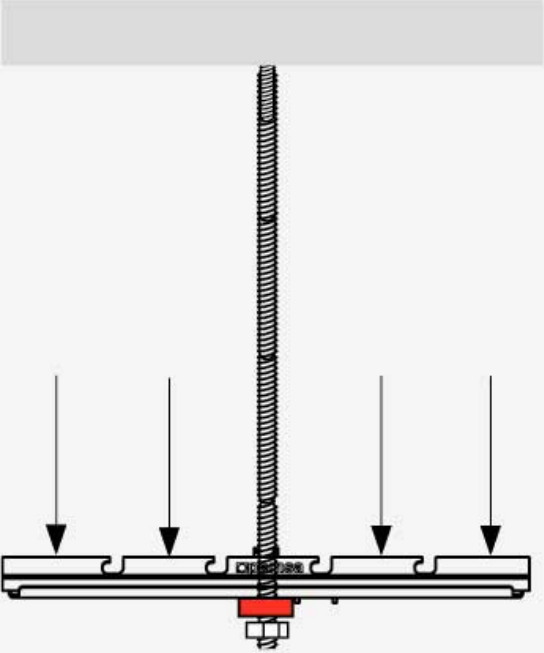↓CTA↓ (kg)	◀▶	kg
una varilla / one rod / uma varão		
	100-300	160



Threaded Rod (Ref: 67060141)

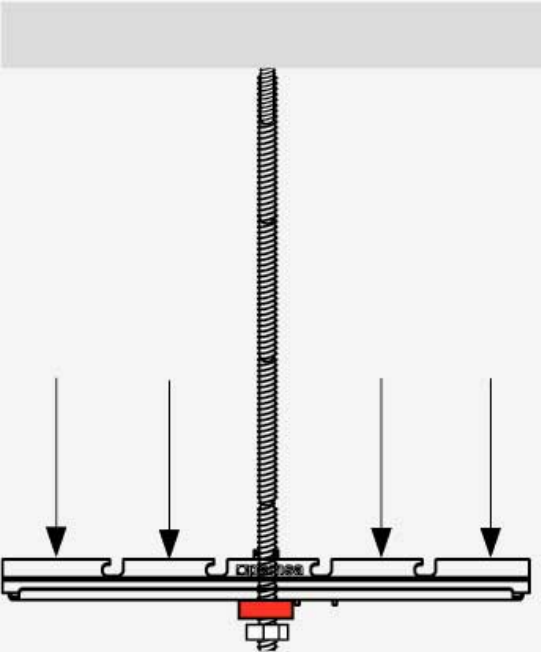↓CTA↓ (kg)		kg
una varilla / one rod / uma varão		
	100-300	160

Product applications

