

Pemsaband Vulcan Heavy Duty



Descripción

Ventajas

Aplicaciones

Soluciones



Características técnicas principales					
 50	 50, 75, 100, 150, 225, 300, 450, 600, 750, 900	 Acero con prot. superficial	 20 J	 IP23	 -50 / 150 °C
 A1 No combustible					

Datos de producto					
				Ref	mm²
PG	Clase 3	50	3	82004637	2381
PG	Clase 3	75	3	82004638	3611
PG	Clase 3	100	3	82004639	4841
PG	Clase 3	150	3	82004640	7301
PG	Clase 3	225	3	82004641	10863
PG	Clase 3	300	3	82004642	14523
PG	Clase 3	450	3	82004643	21843
PG	Clase 3	600	3	82004644	29163
PG	Clase 3	750	2	82004645	35808
PG	Clase 3	900	2	82004646	43008
AZ+	Clase 8	50	3	82004663	2381
AZ+	Clase 8	75	3	82004664	3611
AZ+	Clase 8	100	3	82004665	4841
AZ+	Clase 8	150	3	82004666	7301
AZ+	Clase 8	225	3	82004667	10863
AZ+	Clase 8	300	3	82004668	14523
AZ+	Clase 8	450	3	82004669	21843
AZ+	Clase 8	600	3	82004670	29163
AZ+	Clase 8	750	2	82004671	35808
AZ+	Clase 8	900	2	82004672	43008

 Sistema de protección
CU - Cobreado
PG - Pregalvanizado
EZ - Electrocinchado
BC - Electrocinchado Bicromatado
BK8 - Acabado Alta Resistencia
GC - Galvanizado en Caliente
INOX - Acero Inoxidable
PT - Pintura Poliester
AL - Aluminio
LN - Latón or Latón Niquelado

 Materiales Aislantes
PC+ABS - Policarbonato + ABS Libre de halógenos

Pemsaband Vulcan

07/10/2026

Pemsaband Vulcan Heavy Duty

3/6

- PVC - Policloruro de Vinilo
- PP - Polipropileno Libre de Halógenos
- PA6 - Poliamida 6 Libre de Halógenos
- PA12 - Poliamida 12 Libre de Halógenos
- PU - Poliuretano
- PE - Polietileno
- NBR - Caucho NBR
- PET - Poliestirester Termoplástico
- TPV - Termoplástico



www.pemsa-rejiband.com

Toda información incluida en este documento es propiedad de Pemsa®. Dicha información no podrá ser reproducida, total o parcialmente, ni divulgada a terceros, ni utilizada para cualquier otro propósito, sin consentimiento previo y expreso y por escrito de Pemsa®. Todos los derechos de Propiedad Intelectual e Industrial que eventualmente puedan recaer sobre esta documentación, incluyendo Know-how, patentes, diseño industrial o cualesquiera otros derechos, pertenecen a Pemsa®. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex son marcas registradas propiedad de Pemsa Cable Management, S.A.



Diagramas de carga




Technical data


Test for safety working loads installed in the horizontal way

Values obtained in accordance with IEC 61537, edition 3, according to the horizontal tests of multiple spans listed in point 10.3.4 of this standard, with a safety factor of 170% and without collapse in any case.

The safety working loads test on the 750 and 900 mm wide cable trays were carried out in accordance with the test method set out in section 10.4, and also included a safety factor of 170%.

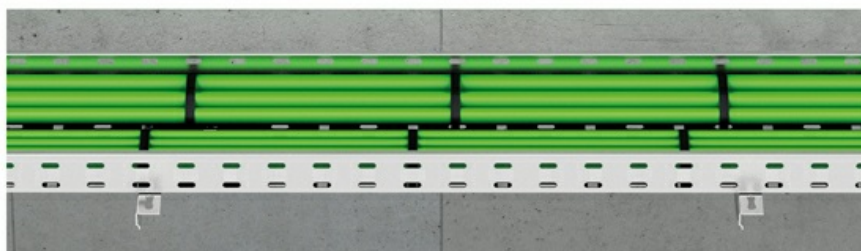

Working loads for widths of 750 and 900 mm on request

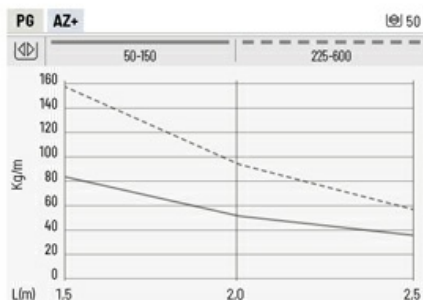

Working loads for widths of 750 and 900 mm on request



www.pemsa-rejiband.com

Toda información incluida en este documento es propiedad de Pemsa®. Dicha información no podrá ser reproducida, total o parcialmente, ni divulgada a terceros, ni utilizada para cualquier otro propósito, sin consentimiento previo y expreso y por escrito de Pemsa®. Todos los derechos de Propiedad Intelectual e Industrial que eventualmente puedan recaer sobre esta documentación, incluyendo Know-how, patentes, diseño industrial o cualesquiera otros derechos, pertenecen a Pemsa®. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex son marcas registradas propiedad de Pemsa Cable Management, S.A.




Technical data

Test for safety working loads installed in the horizontal way

Values obtained in accordance with IEC 61537, edition 3, according to the horizontal tests of multiple spans listed in point 10.3.4 of this standard, with a safety factor of 170% and without collapse in any case.



Safe working load test conditions for cable trays EN61537

Support Span	0.5 m - 1 m - 1.5 m - 2 m - 2.5 (depending on cable tray height)
Longitudinal deflection	Less than 1% support span
Transverse deflection	Less than 5% of the cable tray width
Placement of joints	$(L/4) > u > (L/5)$ 
Increased safety coefficient	1.7 times the declared safe working load

The safety working loads test on the 750 and 900 mm wide cable trays were carried out in accordance with the test method set out in section 10.4, and also included a safety factor of 170%.

Maximum Fill Capacity


The load values shown in the load diagrams and tables above are tested and designed to allow operation at the maximum capacity based on the usable tray cross-section shown in the table below:



	50	75	100	150	225	300	450	600	750	900
	mm ²									
12...18	542	822	1102	1662	2502	5000				
25	1171	1776	2381	3591	5406	7083	10653	14223	17158	20608
50	2381	3611	4841	7301	10863	14523	21843	29163	35808	43008

Cable tray configurator and selector

For more precise and specific configurations involving electrical cables, and taking into account the maximum working capacity and the usable cross-sectional area of the trays, Pemsa offers Pemsa Pro, a product configurator that selects the most suitable tray for the user-defined cable configuration. For access and more information, scan this QR code.

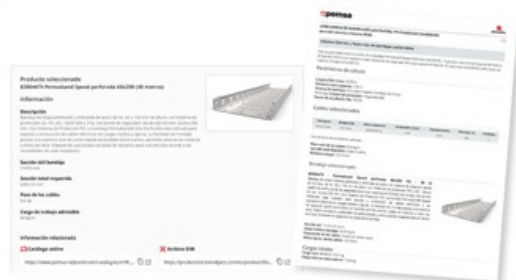



Technical data

The technical data for the Pemsaband® Vulcan cable tray range, based on tests carried out in accordance with the international product standard IEC 61537, 3rd edition, is set out below.

Classification according to:  BS-EN 61537	
Type of material	Metallic
According to flame propagation	No flame propagation
Electrical continuity	With electrical continuity
Maximum impedance of a joint of cable trays	<50 mΩ
Maximum impedance along the length of a cable tray	<50 mΩ/m
Maximum impedance along the width of a cable tray	<50 mΩ
Maximum impedance between length and cover	<50 mΩ
Maximum impedance between the length and equipotential bonding (references 68000034 and 68000035, installed according to assembly instructions)	<50 mΩ
Electrical conductivity	Conductive
Resistance against corrosion	
Pregalvanized PG	Class 3
Hot Dip Galvanising GC	
AZ+ High resistance alloy	Class 8
Temperature of transport, storage, installation and use	
Minimum temperature	-50 °C
Máximum temperature	+150 °C
Perforation in the base area	
Pemsaband® Vulcan Perforated	B Classification
Impact strength	Up to 20 J
SWL test (Safety working loads)	
Horizontal SWL test	Spans 0.5, 1, 1.5, 2 and 2.5 meters

