

Descripción

Bandeja de chapa metálica perforada con sistema de conexión rápida Pemsaband Vulcan Heavy Duty de altura 50 mm, fabricada en acero con Sistemas de protección PG y AZ+. El Sistema de conexión rápida con clips de fijación sin necesidad de herramientas que permite ahorrar costes en material y mano de obra. Ala de alto 50 mm, Ancho 100 mm, Con Sistema de Protección PG. La bandeja Pemsaband® Vulcan Heavy Duty está indicada para soporte y conducción de cables eléctricos y de telecomunicaciones con cargas elevadas. La gama de producto Pemsaband® Vulcan ha sido diseñada conforme a los requisitos técnicos de la edición 3 de la norma de producto IEC 61537 y a la BS-EN 61537

Ventajas

Alta resistencia a la corrosión. Disponible en Sistemas de protección PG y AZ+. Clase 3 y Clase 8 según BS EN 61537

Amplia gama de tamaños y accesorios. Tabiques separadores, tapas, curvas, uniones en T, cruces, elevadores, soportes y accesorios para conectar luminarias o dispositivos

Diseño de perforaciones que facilita el embridado de los cables

Nuevo diseño del perfil y del borde de seguridad. El área de contacto aumenta en un 80 %. Aumenta la superficie de contacto entre la bandeja portacables y la cubierta, lo que garantiza la continuidad eléctrica de acuerdo con la 3.ª edición de la norma IEC 61357.

Sistema de conexión rápida VulcanFast con clips de fijación rápida sin necesidad de herramientas que permite ahorrar costes en material y mano de obra. Reduce 3 veces el tiempo de instalación

Aplicaciones

Sistema destinado a la canalización, soporte, transporte y distribución de cables en instalaciones eléctricas y/o de telecomunicaciones. Es aplicable, entre otros, a los siguientes ámbitos: - Edificación, incluyendo edificios públicos, centros comerciales y Centros de Proceso de Datos (CPD). - Obras civiles e infraestructuras, tales como túneles, parkings, aeropuertos, líneas de metro y ferrocarril. - Sector terciario e industrial, siendo apto para aplicaciones en los sectores de industria de transformación, química y alimentaria. El sistema es adecuado para una instalación rápida en interiores en atmósferas controladas, así como en instalaciones exteriores o ambientes húmedos, seleccionando en cada caso el sistema de protección y acabado correspondiente en función de las condiciones ambientales y de servicio.

Soluciones



www.pemsa-rejiband.com

Toda información incluida en este documento es propiedad de Pemsa®. Dicha información no podrá ser reproducida, total o parcialmente, ni divulgada a terceros, ni utilizada para cualquier otro propósito, sin consentimiento previo y expreso y por escrito de Pemsa®. Todos los derechos de Propiedad Intelectual e Industrial que eventualmente puedan recaer sobre esta documentación, incluyendo Know-how, patentes, diseño industrial o cualesquiera otros derechos, pertenecen a Pemsa®. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex son marcas registradas propiedad de Pemsa Cable Management, S.A.



Datos de producto			
ETIM 10		EC000047	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)			
Sistema de Protección		PG	
Acabado		PG3, Pregalvanizado	
Clase Resistencia		Clase 3	
Ala (mm)		50	
Ancho (mm)		100	
Longitud (m)		3	
Material		Acero con prot. superficial	
Impacto (J)		20 J	
Sección (mm2)		4841	
IP		IP23	
Temperatura de trabajo (°C)		-50 / 150 °C	
Comportamiento fuego		A1 No combustible	

🔒 Sistema de protección
CU - Cobreado
PG - Pregalvanizado
EZ - Electrocinchado
BC - Electrocinchado Bicromatado
BK8 - Acabado Alta Resistencia
GC - Galvanizado en Caliente
INOX - Acero Inoxidable
PT - Pintura Poliester
AL - Aluminio
LN - Latón or Latón Niquelado

🏠 Materiales Aislantes
PC+ABS - Policarbonato + ABS Libre de halógenos
PVC - Policloruro de Vinilo
PP - Polipropileno Libre de Halógenos
PA6 - Poliamida 6 Libre de Halógenos
PA12 - Poliamida 12 Libre de Halógenos
PU - Poliuretano
PE - Polietileno
NBR - Caucho NBR
PET - Poliestirester Termoplástico
TPV - Termoplástico

Diagramas de carga




Technical data


Test for safety working loads installed in the horizontal way

Values obtained in accordance with IEC 61537, edition 3, according to the horizontal tests of multiple spans listed in point 10.3.4 of this standard, with a safety factor of 170% and without collapse in any case.

The safety working loads test on the 750 and 900 mm wide cable trays were carried out in accordance with the test method set out in section 10.4, and also included a safety factor of 170%.

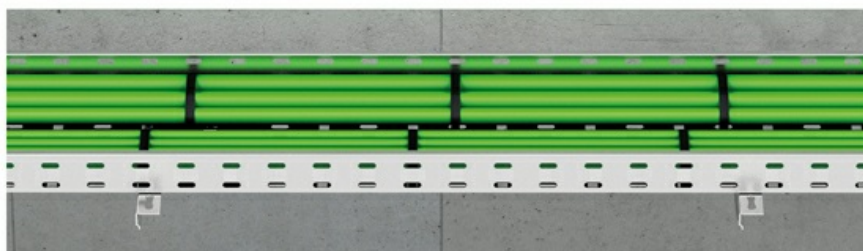

Working loads for widths of 750 and 900 mm on request

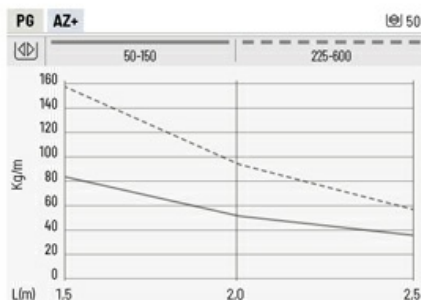

Working loads for widths of 750 and 900 mm on request



Pemsaband Vulcan Heavy Duty (Ref: 82004639)



Technical data

The technical data for the Pemsaband® Vulcan cable tray range, based on tests carried out in accordance with the international product standard IEC 61537, 3rd edition, is set out below.

Classification according to:  BS-EN 61537	
Type of material	Metallic
According to flame propagation	No flame propagation
Electrical continuity	With electrical continuity
Maximum impedance of a joint of cable trays	<50 mΩ
Maximum impedance along the length of a cable tray	<50 mΩ/m
Maximum impedance along the width of a cable tray	<50 mΩ
Maximum impedance between length and cover	<50 mΩ
Maximum impedance between the length and equipotential bonding (references 68000034 and 68000035, installed according to assembly instructions)	<50 mΩ
Electrical conductivity	Conductive
Resistance against corrosion	
Pregalvanized PG	Class 3
Hot Dip Galvanising GC	
AZ+ High resistance alloy	Class 8
Temperature of transport, storage, installation and use	
Minimum temperature	-50 °C
Máximum temperature	+150 °C
Perforation in the base area	
Pemsaband® Vulcan Perforated	B Classification
Impact strength	Up to 20 J
SWL test (Safety working loads)	
Horizontal SWL test	Spans 0.5, 1, 1.5, 2 and 2.5 meters






Technical data

Test for safety working loads installed in the horizontal way

Values obtained in accordance with IEC 61537, edition 3, according to the horizontal tests of multiple spans listed in point 10.3.4 of this standard, with a safety factor of 170% and without collapse in any case.



Safe working load test conditions for cable trays EN61537

Support Span	0.5 m - 1 m - 1.5 m - 2 m - 2.5 (depending on cable tray height)
Longitudinal deflection	Less than 1% support span
Transverse deflection	Less than 5% of the cable tray width
Placement of joints	$(L/4) > u > (L/5)$ 
Increased safety coefficient	1.7 times the declared safe working load

The safety working loads test on the 750 and 900 mm wide cable trays were carried out in accordance with the test method set out in section 10.4, and also included a safety factor of 170%.

Maximum Fill Capacity

The load values shown in the load diagrams and tables above are tested and designed to allow operation at the maximum capacity based on the usable tray cross-section shown in the table below:



	50	75	100	150	225	300	450	600	750	900
	mm ²									
12..18	542	822	1102	1662	2502	5000				
25	1171	1776	2381	3591	5406	7083	10653	14223	17158	20608
50	2381	3611	4841	7301	10863	14523	21843	29163	35808	43008

Cable tray configurator and selector

For more precise and specific configurations involving electrical cables, and taking into account the maximum working capacity and the usable cross-sectional area of the trays, Pemsa offers Pemsa Pro, a product configurator that selects the most suitable tray for the user-defined cable configuration. For access and more information, scan this QR code.

