


Eclisse angle Metatray

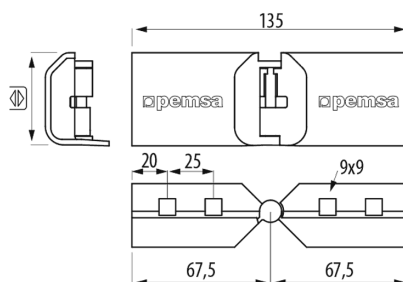

Description

Advantages

Applications

Solutions



Main technical characteristics

Colour	Gris RAL 7035		60, 100		8		-20 / 60 °C		GRADO UL94: V0		Résistant UL568	ETIM 10 EC002413
--------	---------------	---	---------	---	---	---	-------------	---	----------------	--	-----------------	---------------------

Product data

	Ref	kg/u
60	81000282	0,061
100	81000283	0,155

 Système de Protection

- CU - Cuivrage
- PG - Pre-galvanisé
- EZ - Electrozingage
- BC - Electrogalvanised Bichromate / Electrozingage Bichromaté
- BK8 - Protection Haute Résistance
- GC - Galvanisation à Chaud /
- INOX - Acier Inoxydable. AISI 304, AISI 316L
- PT - Peinture Polyester
- AL - Aluminium
- LN - Laiton or Laiton Nickelé

 Matériaux isolants

- PC+ABS - Halogen Free Polycarbonate + ABS / Polycarbonate + ABS sans halogène
- PVC - Polychlorure de vinyle
- PP - Polypropylène sans halogène
- PA6 - Polyamide 6 sans halogène
- PA12 - Polyamide 12 sans halogène
- PU - Polyuréthane
- PE - Polyéthylène
- NBR - Caoutchouc NBR
- PET - Polyesterester Thermoplastique
- TPV - Thermoplastique

Product applications

