

Pemsaband Vulcan

17/09/2026

Pemsaband Vulcan Light Duty (Ref: 82004621

1/5

)



Descrição

Vantagens

Aplicações

Soluções



www.pemsa-rejiband.com



Toda a informação incluída neste documento é propriedade da Pemsa®. Estas informações não podem ser reproduzidas, no todo ou em parte, nem divulgadas a terceiros, nem utilizadas para qualquer outro fim, sem o prévio consentimento expresso por escrito da Pemsa®. Todos os direitos de Propriedade Intelectual e Industrial que possam eventualmente recair sobre esta documentação, incluindo o know-how, patentes, desenho industrial ou quaisquer outros direitos, pertencem à Pemsa®, Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex são marcas registadas propriedade da Pemsa Cable Management, S.A.

Pemsaband Vulcan Light Duty (Ref: 82004621

2/5

)

Dados do produto

ETIM 10		Material	Aço com proteção de superfície
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		Resistência ao impacto	20 J
Sistema de proteção	PG	Seção (mm2)	542
Acabamento	PG3,Pregalvanizado	IP	IP23
Classe de Résistencia	Clase 3	Temperatura de trabalho (°C)	-50 / 150 °C
Aba (mm)	12	Resistência ao fogo	A1 Não combustíble
Largura (mm)	50		
Comprimento (m)	3		

🔒 Sistema de protecção

- CU - Revestimento de cobre
- PG - Pré-galvanizado
- EZ - Electrogalvanizado
- BC - Bicromatizada electrogalvanizada
- BK8 - Acabamento de Alta Resistência
- GC - Galvanizado a Quente
- INOX - Aço Inoxidável
- PT - Tinta de poliéster
- AL - Alumínio
- LN - Latão ou Latão Niquelado

🏠 Materiais Isolantes

- PC+ABS - Policarbonato + ABS Livre de Halogéneo
- PVC - Cloreto de polivinilo
- PP - Sem halogéneo de polipropileno
- PA6 - Poliamida 6 Halogéneo Livre
- PA12 - Poliamida 12 Halogéneo Livre
- PU - Poliuretano
- PE - Polietileno
- NBR - Borracha NBR
- PET - Poliestireno Termoplástico
- TPV - Termoplástico

)

Diagramas de carga






Technical data


Test for safety working loads installed in the horizontal way

Values obtained in accordance with IEC 61537, edition 3, according to the horizontal tests of multiple spans listed in point 10.3.4 of this standard, with a safety factor of 170% and without collapse in any case.

The safety working loads test on the 750 and 900 mm wide cable trays were carried out in accordance with the test method set out in section 10.4, and also included a safety factor of 170%.

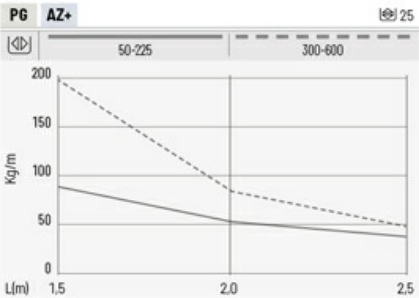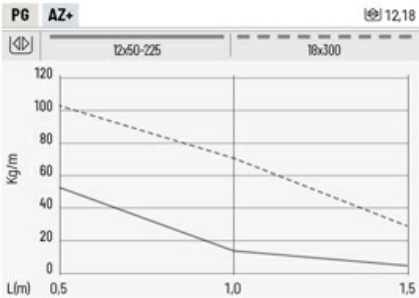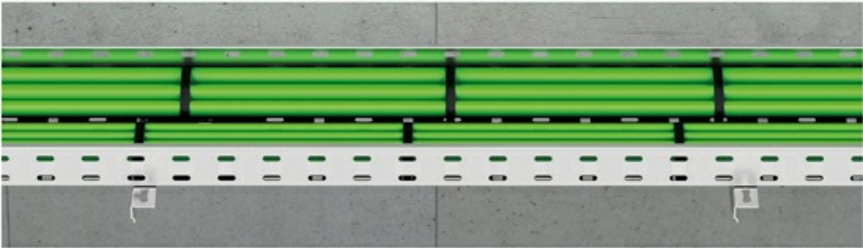

Working loads for widths of 750 and 900 mm on request

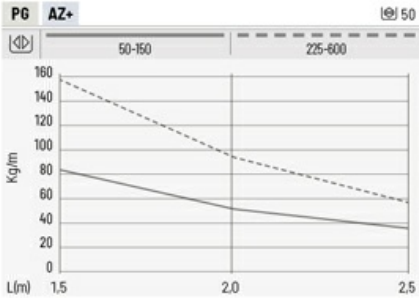

Working loads for widths of 750 and 900 mm on request



www.pemsa-rejiband.com

Toda a informação incluída neste documento é propriedade da Pemsa®. Estas informações não podem ser reproduzidas, no todo ou em parte, nem divulgadas a terceiros, nem utilizadas para qualquer outro fim, sem o prévio consentimento expresso por escrito da Pemsa®. Todos os direitos de Propriedade Intelectual e Industrial que possam eventualmente recair sobre esta documentação, incluindo o know-how, patentes, desenho industrial ou quaisquer outros direitos, pertencem à Pemsa®. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex são marcas registadas propriedade da Pemsa Cable Management, S.A.



)



Technical data

The technical data for the Pemsaband® Vulcan cable tray range, based on tests carried out in accordance with the international product standard IEC 61537, 3rd edition, is set out below.

Classification according to:  BS-EN 61537	
Type of material	Metallic
According to flame propagation	No flame propagation
Electrical continuity	With electrical continuity
Maximum impedance of a joint of cable trays	<50 mΩ
Maximum impedance along the length of a cable tray	<50 mΩ/m
Maximum impedance along the width of a cable tray	<50 mΩ
Maximum impedance between length and cover	<50 mΩ
Maximum impedance between the length and equipotential bonding (references 68000034 and 68000035, installed according to assembly instructions)	<50 mΩ
Electrical conductivity	Conductive
Resistance against corrosion	
Pregalvanized PG	Class 3
Hot Dip Galvanising GC	
AZ+ High resistance alloy	Class 8
Temperature of transport, storage, installation and use	
Minimum temperature	-50 °C
Máximum temperature	+150 °C
Perforation in the base area	
Pemsaband® Vulcan Perforated	B Classification
Impact strength	Up to 20 J
SWL test (Safety working loads)	
Horizontal SWL test	Spans 0.5, 1, 1.5, 2 and 2.5 meters





Technical data

Test for safety working loads installed in the horizontal way
Values obtained in accordance with IEC 61537, edition 3, according to the horizontal tests of multiple spans listed in point 10.3.4 of this standard, with a safety factor of 170% and without collapse in any case.

Safe working load test conditions for cable trays EN61537

Support Span

0.5 m - 1 m - 1.5 m - 2 m - 2.5 (depending on cable tray height)


Longitudinal deflection

Less than 1% support span

Transverse deflection

Less than 5% of the cable tray width

Placement of joints


$(L/4) > u > (L/5)$ 

Increased safety coefficient

1.7 times the declared safe working load

The safety working loads test on the 750 and 900 mm wide cable trays were carried out in accordance with the test method set out in section 10.4, and also included a safety factor of 170%.

Maximum Fill Capacity
The load values shown in the load diagrams and tables above are tested and designed to allow operation at the maximum capacity based on the usable tray cross-section shown in the table below:



	50	75	100	150	225	300	450	600	750	900
	mm²									
12..18	542	822	1102	1662	2502	5000				
25	1171	1776	2381	3591	5406	7083	10653	14223	17158	20608
50	2381	3611	4841	7301	10863	14523	21843	29163	35808	43008

Cable tray configurator and selector
For more precise and specific configurations involving electrical cables, and taking into account the maximum working capacity and the usable cross-sectional area of the trays, Pemsa offers Pemsa Pro, a product configurator that selects the most suitable tray for the user-defined cable configuration. For access and more information, scan this QR code.

