


## PQ Outside Riser

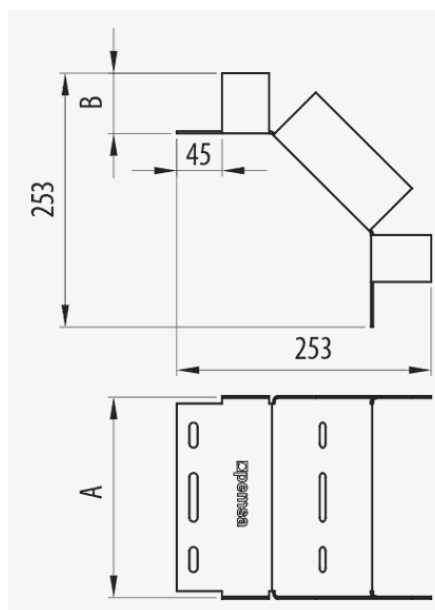

### Description

Metal accessory for the creation of a 90° Outside Riser in the wiring installation of the Pemsaband® PQU and PQW tray. It enables a change of height in a vertical direction with great ease and avoids any damage in the routing of the cables. Joins with nuts and bolts. Approved according to CEPSA and REPSOL specifications. Made of steel, with GC Protection System 85 microns thick.

### Advantages

Compatible with Pemsaband® PQU and Pemsaband® PQW ranges.

Available for all heights 15, 30, 50, 60 and in widths from 100 to 600.

Conforms to IEC 61537 and CE Conformity to Directive 2014/35/EU.

Specially designed for the petrochemical sector, with CEPSA and REPSOL approvals.

GC protection system (standard UNE-EN ISO 1461), suitable for outdoor installations and in aggressive environments. Corrosion resistance class 8 according to IEC 61537.











### Applications

Suitable for the creation of level changes and 90° angle drops in Pemsaband® PQU and PQW trays, for the Support, management and distribution of cables in Petrochemical, Oil & Gas, Offshore, Civil works and Infrastructures, as well as in tunnels and installation galleries.

### Solutions





Main technical characteristics							
 GC	 Class 8	 15, 30, 50, 60	 100, 150, 200, 300, 400, 500, 600	 100	 1	 Steel with surface coating	
 20 J	 -50 / 150 °C	 A1 No combustible	ETIM EC002400				

Product data			
		Ref	kg/u
15	100	70253010	0.758
15	150	70253015	1.081
15	200	70253020	1.421
15	300	70253030	2.081
30	100	70253110	0.848
30	150	70253115	1.151
30	200	70253120	1.471
30	300	70253130	2.091
30	400	70253140	2.691
30	500	70253150	3.331
30	600	70253160	3.931
50	100	70253210	0.928
50	150	70253215	1.201
50	200	70253220	1.491
50	300	70253230	2.061
50	400	70253240	2.601
50	500	70253250	3.191
50	600	70253260	3.731
60	100	70253310	0.951
60	150	70253315	1.211
60	200	70253320	1.491
60	300	70253330	2.021
60	400	70253340	2.541
60	500	70253350	3.101
60	600	70253360	3.611

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint



PQ Outside Riser

- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic

