


## 90° Outside Riser MEGAband ( Ref: 93634500 )

1/4

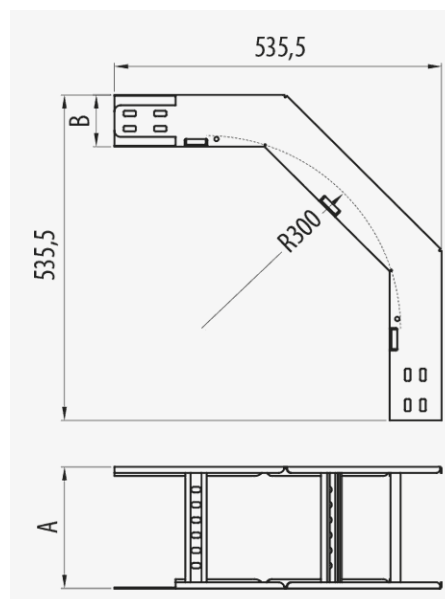

### Description

Metal accessory for the creation of an outside riser in the wiring installation with the Megaband® ladder. Of 100 mm height, Width 500 mm, With GC protection system, HDG finish. It allows to make drops and changes of angle at 90° with great ease. Quick connection assembly using the click system. Made of steel, in various sizes and Protection Systems. Bending radius 300 mm. Check availability of 600 mm radius.

### Advantages

Curved safety edge which offers maximum protection.

Connection to ladder by rapid assembly Click system. Only the Megaband® M8 joint kit or M8 nuts and bolts required

Available in various protection systems: EZ, GC and stainless steel AISI 304 and AISI 316L.

Electrical continuity guaranteed according to standard IEC61537.

Its design allows to make drops and changes of height with ease.

### Applications

Suitable for level changes in cable management in Megaband® ladders in electrical and telecommunications installations in public buildings, infrastructures and civil works, industrial facilities, tertiary sector.

### Solutions



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



| Product data      |                         |                                |                            |
|-------------------|-------------------------|--------------------------------|----------------------------|
| Protection System | GC                      | kg/u                           | 3.631                      |
| Finish            | HDG, Hot Dip Galvanised | u                              | 1                          |
| Resistance Class  | Class 6                 | Material                       | Steel with surface coating |
| Flange (mm)       | 100                     | Impact Strength (J)            | 20 J                       |
| Width (mm)        | 500                     | Working temperature range (°C) | -50 / 150 °C               |
| R stat. (mm)      | 300                     | Fire resistance                | A1 No combustible          |

Protection System

**CU** - Copper electroplated

**PG** - Pregalvanised

**EZ** - Electrogalvanised

**BC** - Electrogalvanised Bichromate

**BK8** - High Resistance Coating

**GC** - Hot Dip Galvanising

**INOX** - Stainless Steel

**PT** - Polyester Paint

**AL** - Aluminum

**LN** - Brass or Nickel-plated brass

Insulating materials

**PC+ABS** - Halogen Free Polycarbonate + ABS

**PVC** - Polyvinyl Chloride

**PP** - Halogen Free Polypropylene

**PA6** - Halogen Free Polyamide 6

**PA12** - Halogen Free Polyamide 12

**PU** - Polyurethane

**PE** - Polyethylene

**NBR** - NBR rubber

**PET** - Thermoplastic Polyester

**TPV** - Thermoplastic

## Product applications



