Ceiling Supports

01/11/2026

Rod Connector (Ref: 81000443)



Description

Connector for mounting two threaded rods. M 8, M 8, With EZ protection system. in order to obtain the suitable length for the installation from the ceiling of the electrical installation, 30 mm long and an external diameter of 12 mm.

Advantages

BC protection system (standard EN-ISO 2081), gold colour, better corrosion resistance, suitable for indoor installations. Corrosion resistance class 5.

CE conformity to directive 2014/35 / EU.

It provides the necessary rigidity so that deformation does not occur.

Joining of sections of 500 mm and 1000 mm M8 rod.

Applications

Used for the joining of M8 threaded rods as a support and ceiling mounting for Rejiband® and Pemsaband® trays in the management and distribution of electrical wiring and/or telecommunications.

Solutions

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Rod Connector (Ref: 81000443)

Product data

ETIM 10	EC001005	**u**	50
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		**Material**	Steel with surface coating
Protection System	EZ	**Working temperature range (°C)**	-50 / 150 °C
Finish	EZ2, Electrogalvanised	**Fire resistance**	A1 No combustible
Resistance Class	Class 3		
M/PG	M 8		
kg/u	0,021		

Ⓢ Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Ⓜ Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber


PET - Thermoplastic Polyester

TPV - Thermoplastic

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Rod Connector (Ref: 81000443)


Product applications

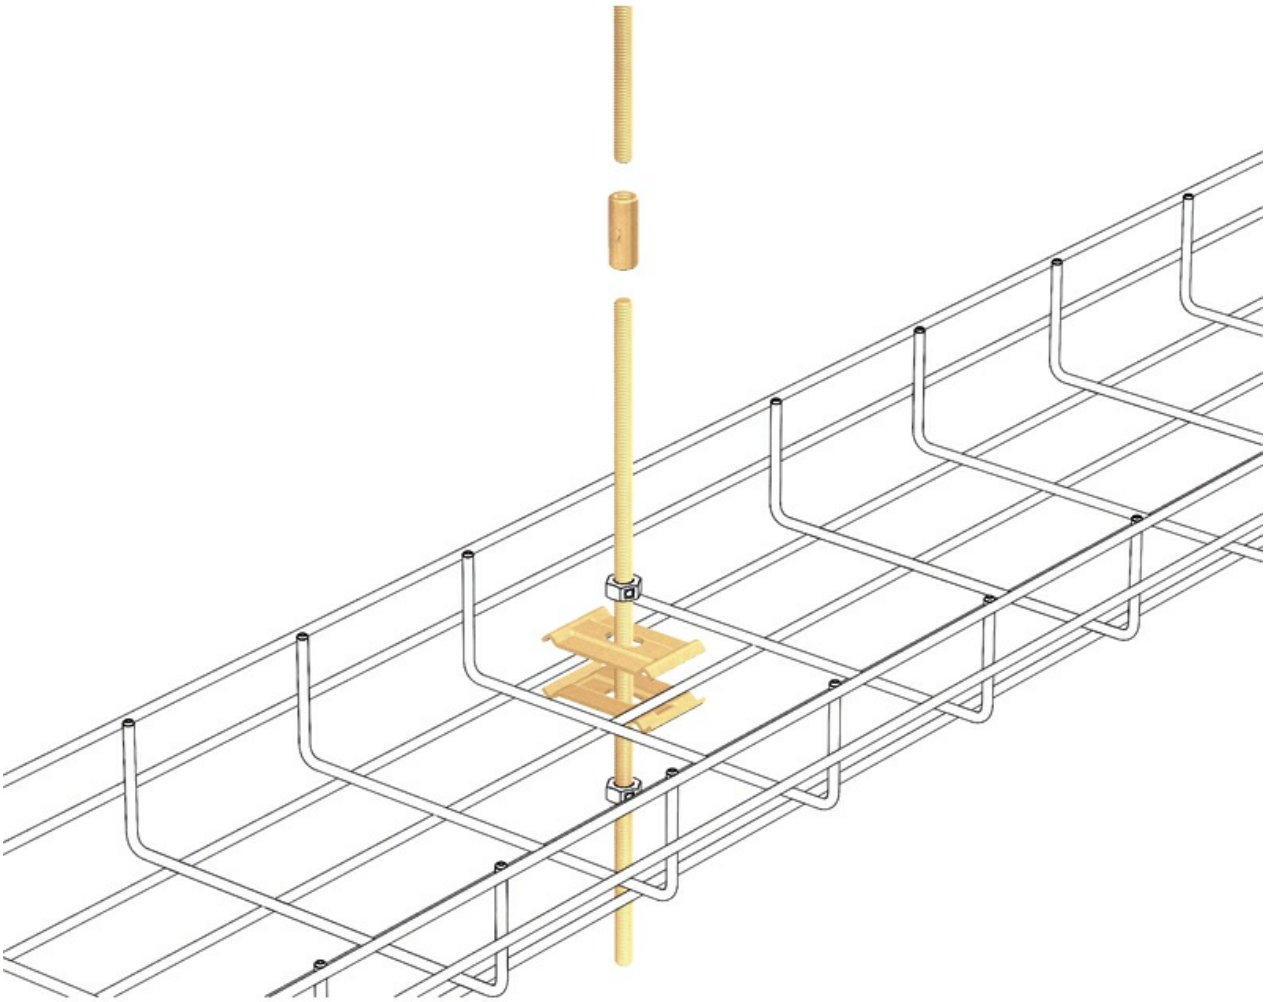

www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Rod Connector (Ref: 81000443)

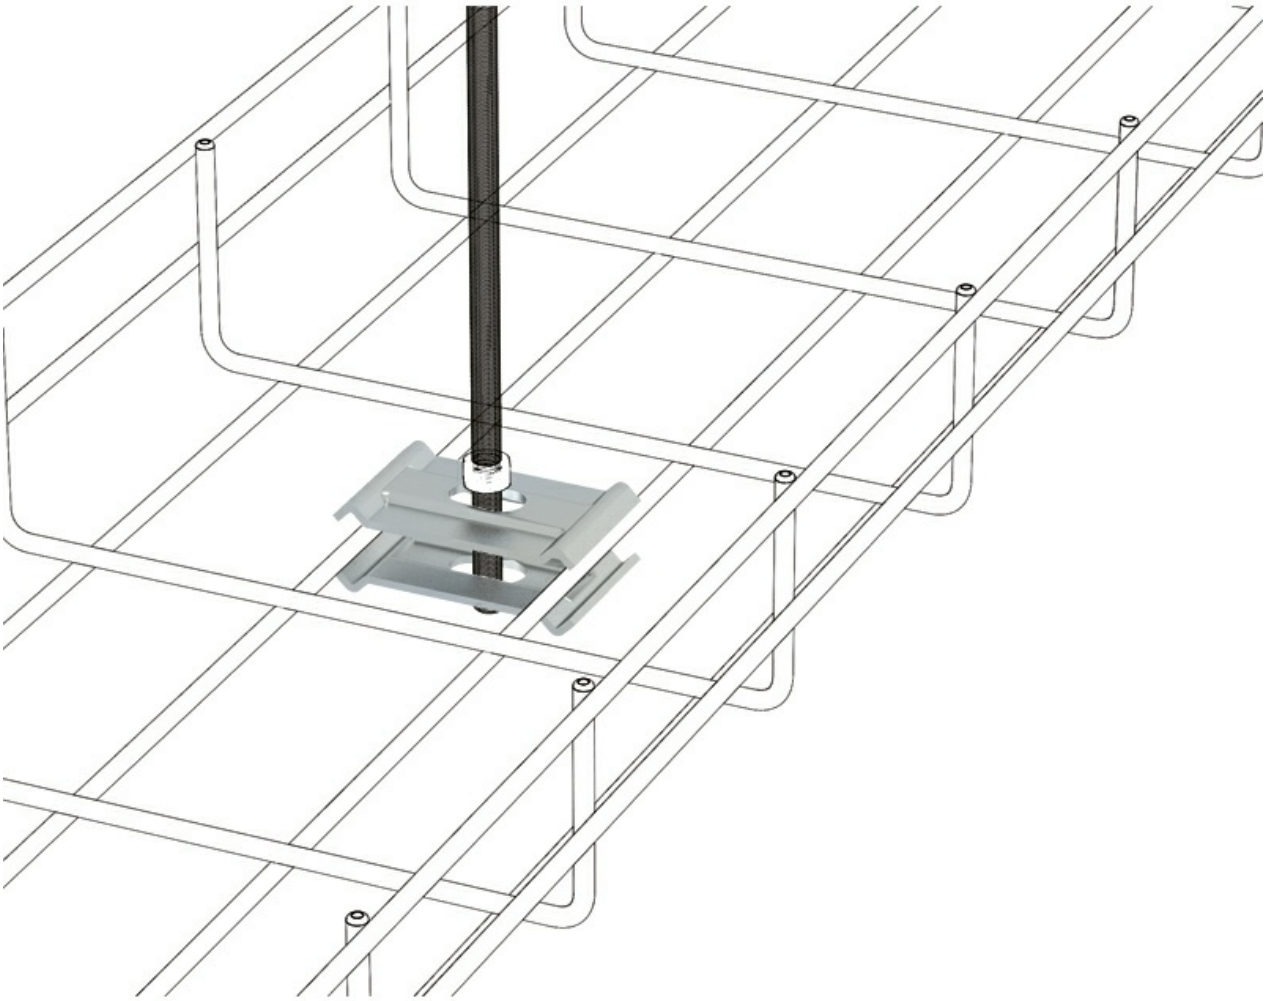

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."