


**PQ Equal Reducer** ( Ref: 70263330 )

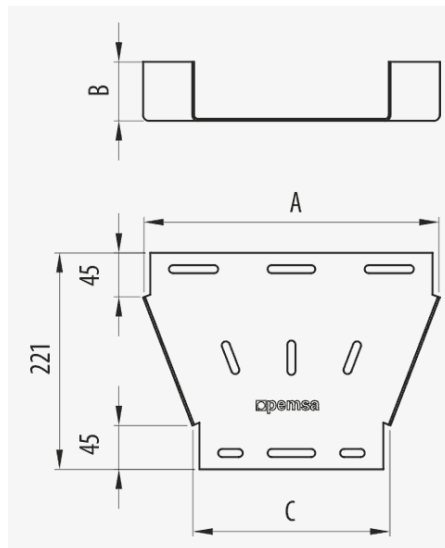

**Description**

Metal accessory for the creation of an equal reducer for the installation of wiring with the Pemsaband® PQU and PQW trays with heights of 15, 30, 50 and 60 mm. Of 60 mm height, Width 300 mm, With a reduction of 200 mm. With GC Protection System. It allows making changes of width of different sections with great ease using a single piece.

**Advantages**

GC protection system (standard UNE-EN ISO 1461), suitable for outdoor installations and in aggressive environments. Corrosion resistance class 8 according to IEC 61537.

Compatible with Pemsaband® PQU and Pemsaband® PQW ranges.

Conforms to IEC 61537 and CE Conformity to Directive 2014/35/EU.

Available for all heights 15, 30, 50 and 60. Please consult for the available widths and reduction sizes.

Specially designed for the petrochemical sector, with CEPSA and REPSOL approvals.

**Applications**

Suitable for the creation of width reductions in Pemsaband® PQU and PQW trays, for the Support, management and distribution of cables in Petrochemical, Oil & Gas, Offshore, Civil works and Infrastructures, as well as in tunnels and installation galleries.

**Solutions**



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Product data			
Protection System	GC	kg/u	1.141
Finish	HDG, Hot Dip Galvanised	u	1
Resistance Class	Class 8	Material	Steel with surface coating
Flange (mm)	60	Impact Strength (J)	20 J
Width (mm)	300	Working temperature range (°C)	-50 / 150 °C
Reduce to:	200	Fire resistance	A1 No combustible
R stat. (mm)	100		

🔒 Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

🔒 Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic