

Description

100 mm high steel wire mesh tray with surface protection, or stainless steel AISI 304 or 316L, with rounded safety edge for the support and management of cables. Of 100 mm height, Width 150 mm, With INOX protection system, I316L finish. The Rejiband cable tray is made up of a mesh of electrowelded rods that provide high strength and elasticity. The ease of installation, thanks to its flexibility saves on material and labour costs. Manufactured according to international standard IEC 61537. Its wide variety of sizes and Protection Systems facilitates the most appropriate choice according to the needs of each installation.

Advantages

Flange height 100 mm and available in widths of 100, 150, 200, 300, 400, 500 and 600 mm with a wide range of accessories.

Rounded safety edge that prevents damage to the cables and harm to the installer.

High resistance, flexibility and adaptable to each project providing a saving of more than 30% in the installation.

N Mark of Aenor, UL Certificate, Certificate IECC CB according to IEC 61537.

E90 fire resistance (90 minutes, 1000°C) according to DIN 4102-12.

Applications

Support, management and distribution of cables in Electrical and/or telecommunications installations in: Civil Works, Tunnels, Car Parks, Public Buildings, Shopping Centres, Data Processing Centres, Infrastructures, Airports, Underground and Railway. Tertiary sector and industrial applications: Naval, Petrochemical, Textile, Chemical and Food. Indoor applications in the dry or in exterior atmospheres with wet environments according to the various finishes.

Solutions



INDUSTRIA ALIMENTARIA INDUSTRIA QUIMICA FARMACEUTICA INDUSTRIA PETROQUÍMICA ENERGÍA FOTOVOLTAICA CENTROS DE DATOS EDIFICACIÓN. TERCARIO



TUNELES. INFRAESTRUCTURAS RESISTENCIA AL FUEGO



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."





















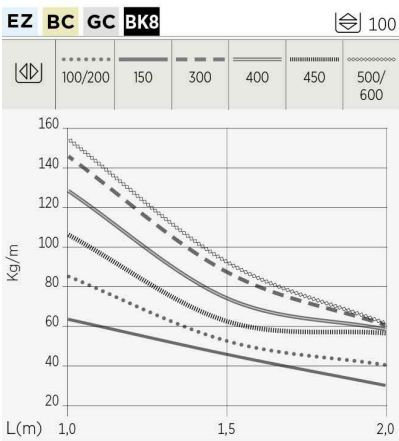


Product data			
Protection System	INOX	u	6
Finish	Stainless Steel AISI 316L	Material	Acero inoxidable AISI 316L
Resistance Class	Class 9D	Impact Strength (J)	20 J
Flange (mm)	100	Section (mm2)	12162
Width (mm)	150	Working temperature range (°C)	-50 / 150 °C
Length (m)	3	Fire resistance	E90 (90 min. 1000°C)
kg/u	1.372		

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass


Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic

Load diagrams



EZ	BC	GC	BK8
			
100			mm²
			100
			150
			200
			300
			400
			450
			500

Valores certificados por:
Values certified by:
Valeurs certifiées par:
Valores certificados por:

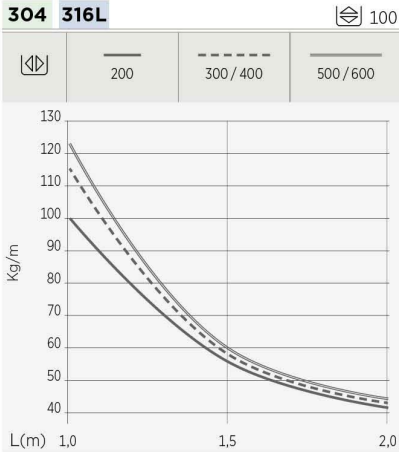


304		316
		mm²
100		100
		150
		200
		300
		400
		500
		600

Valores certificados por:
Values certified by:
Valeurs certifiées par:
Valores certificados por:



Product applications

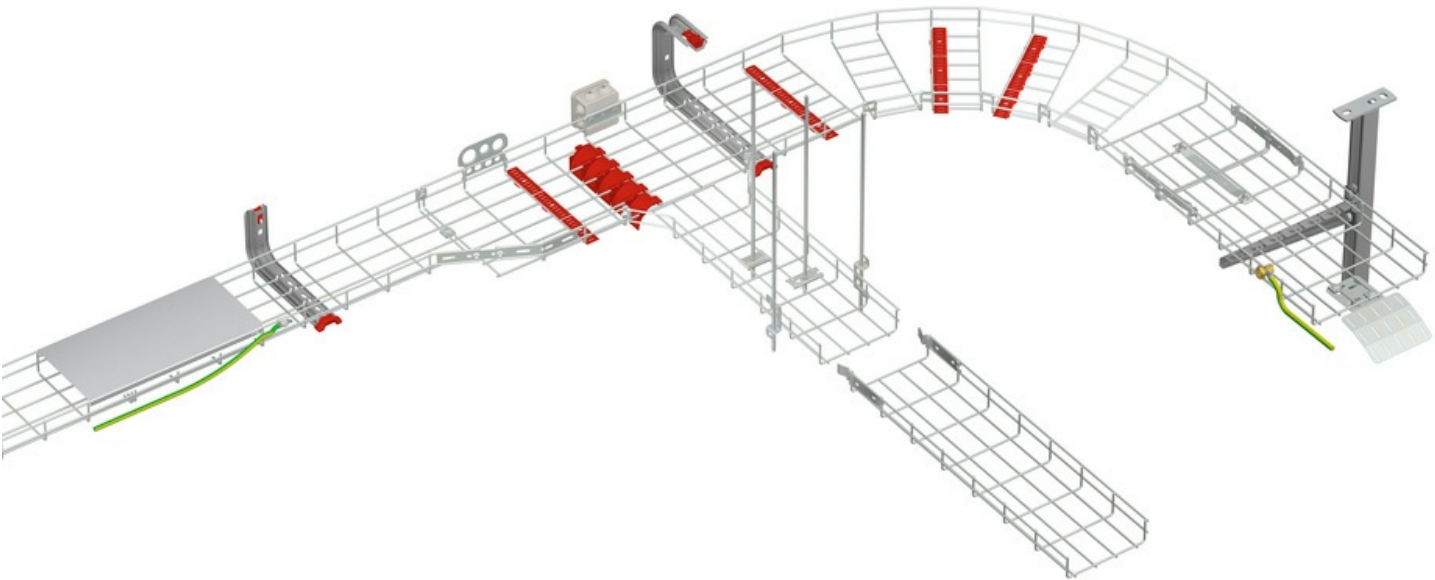

www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



