

Supports Technical Floors 23/04/2024

Metal Foot





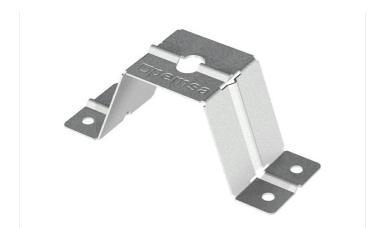





1/3



Description

Metal support for the installation of the Rejiband® wire mesh tray to the floor. Available in two widths of 45 and 90 mm wide and in various Protection Systems. Attachment to the tray is by using the Rejiband® fastening.

Advantages

Mounting and fastening by using screws.

Facilitates the installation of trays on the floor.

Available in PG and GC protection systems.

Applications

Suitable for the installation of trays in raised floors and used for the management of cables in electrical and telecommunications installations in public buildings, infrastructures and civil works, industrial installations, tertiary sector.

Solutions



FOTOVOLTAICA













Supports Technical Floors 23/04/2024

Metal Foot 2/3

Main technical characteristics

45, 90

₩ 10

^{CTA} 65

***** -50 / 150 °C

A1 No combustible

ETIM EC000022

Product data

S	Cass EC 61537		Ref	kg/u
PG	Class 3	45	67020020	0.054
PG	Class 3	90	67020120	0.067
GC	Class 6	45	67030020	0.061
GC	Class 6	90	67030120	0.075

S Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

[®] Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic















Supports Technical Floors 23/04/2024

Metal Foot

3/3

Product applications











