

Rejitech G+

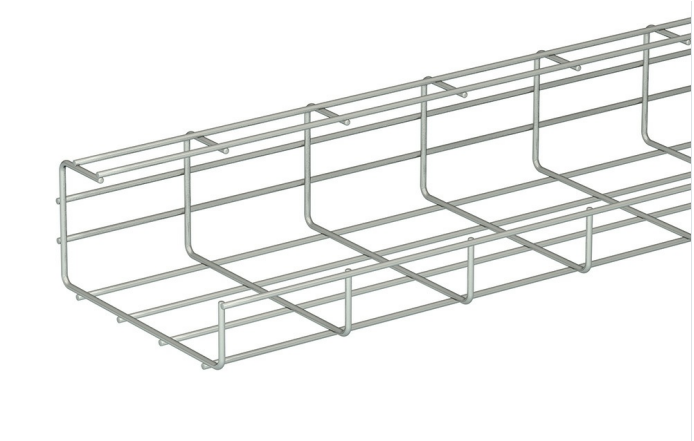

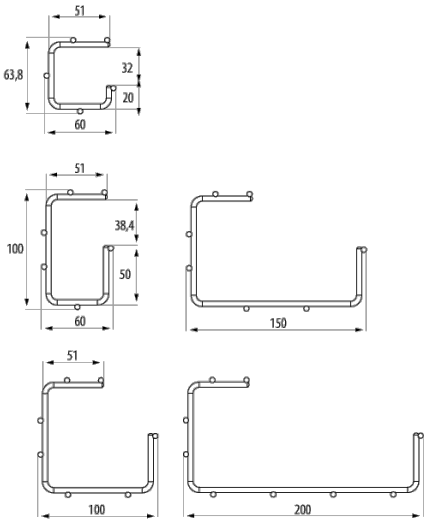

Description

Steel wire mesh tray with heights of 60 and 100 mm, surface protection and safety edge. Used in industrial installations for the support and management of electric cables in false ceilings, confined spaces and on walls. The ease of installation is thanks to the Click quick connect system that requires no fixings for supports and accessories. It requires no additional support and is attached to the ceiling and walls by using just the Rejitech fixing. It has an open structure that allows the lateral introduction of the cables therefore reducing the installation time. Available in different sizes and Protection Systems. It is supplied in 3 m lengths. Manufacturing according to international standard IEC 61537.

Advantages

Direct fixing to the ceiling without additional support by using just the Rejitech Fastener.

Cables are kept tidy and with maximum ventilation.

Installation in false ceilings or confined spaces.

Quick installation by just one person.

It installs quickly without the need for joints or bends.

Applications

Suitable for the management and distribution of cables in electrical and/or telecommunications in industrial installations, Civil Works and Infrastructures, tunnels and inspection galleries. It is mainly used for installations in false ceilings due to its height of 60 mm allowing it to be accommodated in reduced spaces.

Solutions

PHARMACEUTICAL INDUSTRY

OFFSHORE, PORTS

ENERGY

RENEWABLE ENERGIES

DATA CENTERS

SERVICE AND RETAIL

TUNNELS INFRASTRUCTURES

RAILWAY APPLICATIONS

FIRE RESISTANCE SOLUTION

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Main technical characteristics

60, 100 | 60 | mm² 4 | 3 | 24 | Steel with surface coating | 20 J | -50 / 150 °C

A1 No combustible | ETIM 10 EC000853

Product data

Ⓢ	Class IEC 61537		REF	kg/u	mm²
EZ	Class 3	60	60613206	0,666	676
EZ	Class 3	100	60613306	0,824	1975
BK8	Class 8	60	60683206	0,666	676
BK8	Class 8	100	60683306	0,824	1975

Ⓢ Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Ⓜ Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."