


Rejitech G+ SAFECu. Wire mesh tray

1/2

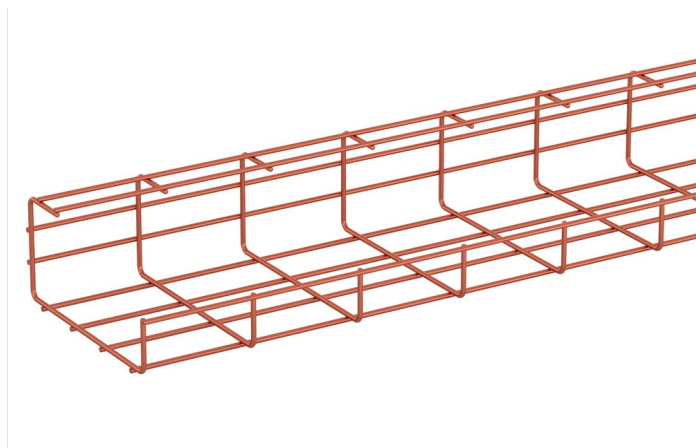

Description

Steel wire mesh tray with heights of 60 and 100 mm, surface protection and safety edge. Used in industrial installations for the support and management of electric cables in false ceilings, confined spaces and on walls. The ease of installation is thanks to the Click quick connect system that requires no fixings for supports and accessories. It requires no additional support and is attached to the ceiling and walls by using just the Rejitech fixing. It has an open structure that allows the lateral introduction of the cables therefore reducing the installation time. Available in different sizes and Protection Systems. It is supplied in 3 m lengths. Manufacturing according to international standard IEC 61537.

Advantages

Direct fixing to the ceiling without additional support by using just the Rejitech Fastener.

Cables are kept tidy and with maximum ventilation.

Installation in false ceilings or confined spaces.

Quick installation by just one person.

It installs quickly without the need for joints or bends.

Applications

Suitable for the management and distribution of cables in electrical and/or telecommunications in industrial installations, Civil Works and Infrastructures, tunnels and inspection galleries. It is mainly used for installations in false ceilings due to its height of 60 mm allowing it to be accommodated in reduced spaces.











Solutions




www.pemsa-rejiband.com


Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Main technical characteristics											
 CU	 Class 1	 60, 100	 60, 100, 150, 200	 mm² 4	 2	 Steel with surface coating	 20 J				
		ETIM									
 -50 / 150 °C	 A1 No combustible										

Product data					
		Ref	kg/u		mm²
60	60	82003264	0.666	16	676
100	60	82003265	0.824	16	1975
100	100	82003266	0.970	8	3787
100	150	82003267	1.031	4	6052
100	200	82003268	1.284	4	8317

 Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

 Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic