
RLH Coupler (Ref: 55008020)



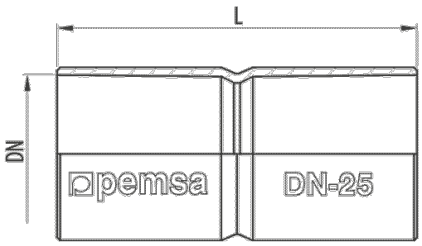

Description

Coupler for RLH type rigid conduit for the protection of electrical cables in building applications. Manufactured in halogen-free thermoplastic material (PC + ABS) with an IP44 protection rating. Push fit connection system to the conduit. Available in grey (RAL 7035) and in a wide variety of sizes.

Advantages

High security, halogen free material UNE/EN 60754-2 y UNE/EN 60754-1. Reduced smoke opacity and toxicity in the event of a fire. Flame retardant.

CE conformity to the 2014/35 directive and the IEC 61386 standard.

Quick assembly via plug-in connection between conduits and fittings.

For connection of RLH rigid and CLH corrugated conduits.

Applications

Suitable for the joining of halogen-free rigid conduits in building, tertiary and industrial applications with high safety requirements. Premises of public attendance.

Solutions

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

RLH Coupler (Ref: 55008020)

Product data

ETIM 10	EC000939
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	
Colour	Grey RAL 7035
DN	NW20
L (mm)	47
kg/u	0,006
u	19

Material	Polycarbonate + ABS
IP	IP44
Working temperature range (°C)	-15 / 90 °C
Fire resistance	LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA

Ⓢ Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Ⓜ Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."