


## Flexible Bend FRPVC ( Ref: 55091025 )

1/2

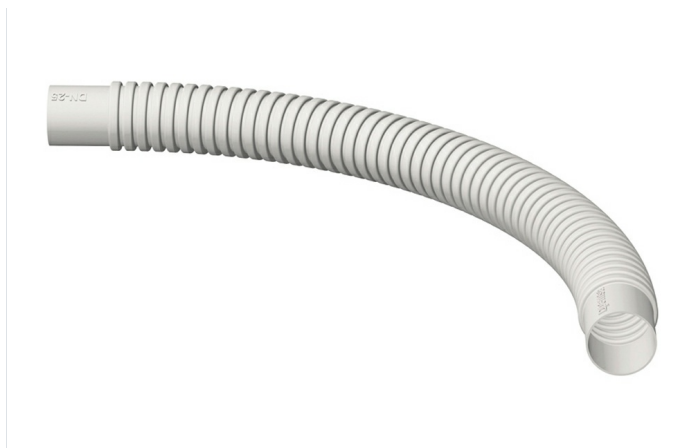

### Description

Flexible PVC bend in grey color (RAL 7035) with an IP44 protection rating for RPVC rigid conduits tubes. Accessory is used for the assembly of PVC conduits by a push fit connection, creating adjustable angles due to its flexible structure.

### Advantages

CE conformity to the 2014/35 directive and the IEC 61386 standard.

Made of PVC, not flame retardant.

Protection index EN 60529: IP44.

Quick assembly via plug-in connection between conduits and fittings.

For connection of rigid RPVC conduits.

### Applications

Suitable for rigid PVC conduits in building, tertiary and industrial applications.

### Solutions



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Product data			
Colour	Grey RAL 7035	u	10
DN	NW25	Material	PVC
Ø d2 (mm)	26.7	IP	IP44
L (mm)	390	Working temperature range (°C)	-5 / 60 °C
kg/u	0.048	Fire resistance	Flame retardant

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass
Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic