
41x82 Cantilever Arm Pendant (Ref: 82004243)

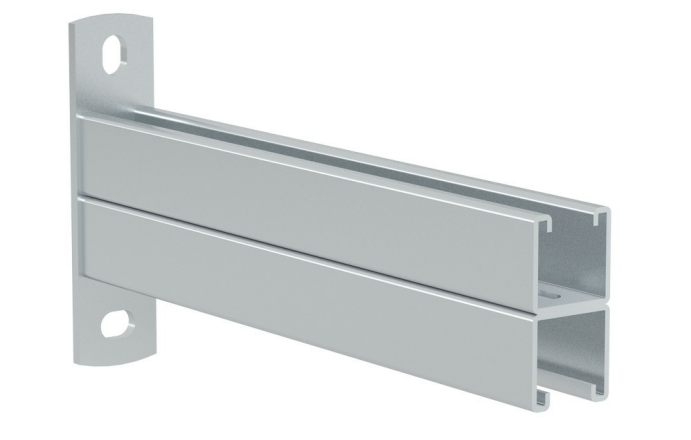

Description

41x82mm horizontal support for wall fixing of cable trays, electrical conduits and other heating pipe installations, A/C, fire protection systems, etc. Width 500 mm, EZ3 finish. It has a reinforced structure that makes it capable of supporting very high loads. Made of steel with GC protection system.

Advantages

Available in GC Protection System

Available in widths from 500 to 1000 mm depending on the protection system. It has wide fixing options.

This range of Cantilever arms 41 has a quick installation solution when using the Strut clip, part number 67030049, making it a quick and safe installation option for Rejiband® wire mesh trays.

The total length of the support is (tray width +55 mm); that is, it includes an additional length to facilitate spacing between the installation and the wall or surface.

Load values according to international standard IEC 61537.

Applications

Application as a horizontal wall support. For supporting Cable Trays (Rejiband®, Pemsaband®, Megaband®, among others) but it is also very useful for supporting electrical conduits and other heating pipe installations, A/C, fire systems etc.

Solutions

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

41x82 Cantilever Arm Pendant (Ref: 82004243)

Product data

ETIM 10	EC001003	**u**	1
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		**Material**	Steel with surface coating
Protection System	EZ	**Working temperature range (°C)**	-25 / 105 °C
Finish	EZ3, Electrogalvanised	**Fire resistance**	A1 No combustible
Resistance Class	Class 3		
Width (mm)	500		
kg/u	3,310		

Ⓢ Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Ⓜ Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber


PET - Thermoplastic Polyester

TPV - Thermoplastic

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

41x82 Cantilever Arm Pendant (Ref: 82004243)

Load diagrams

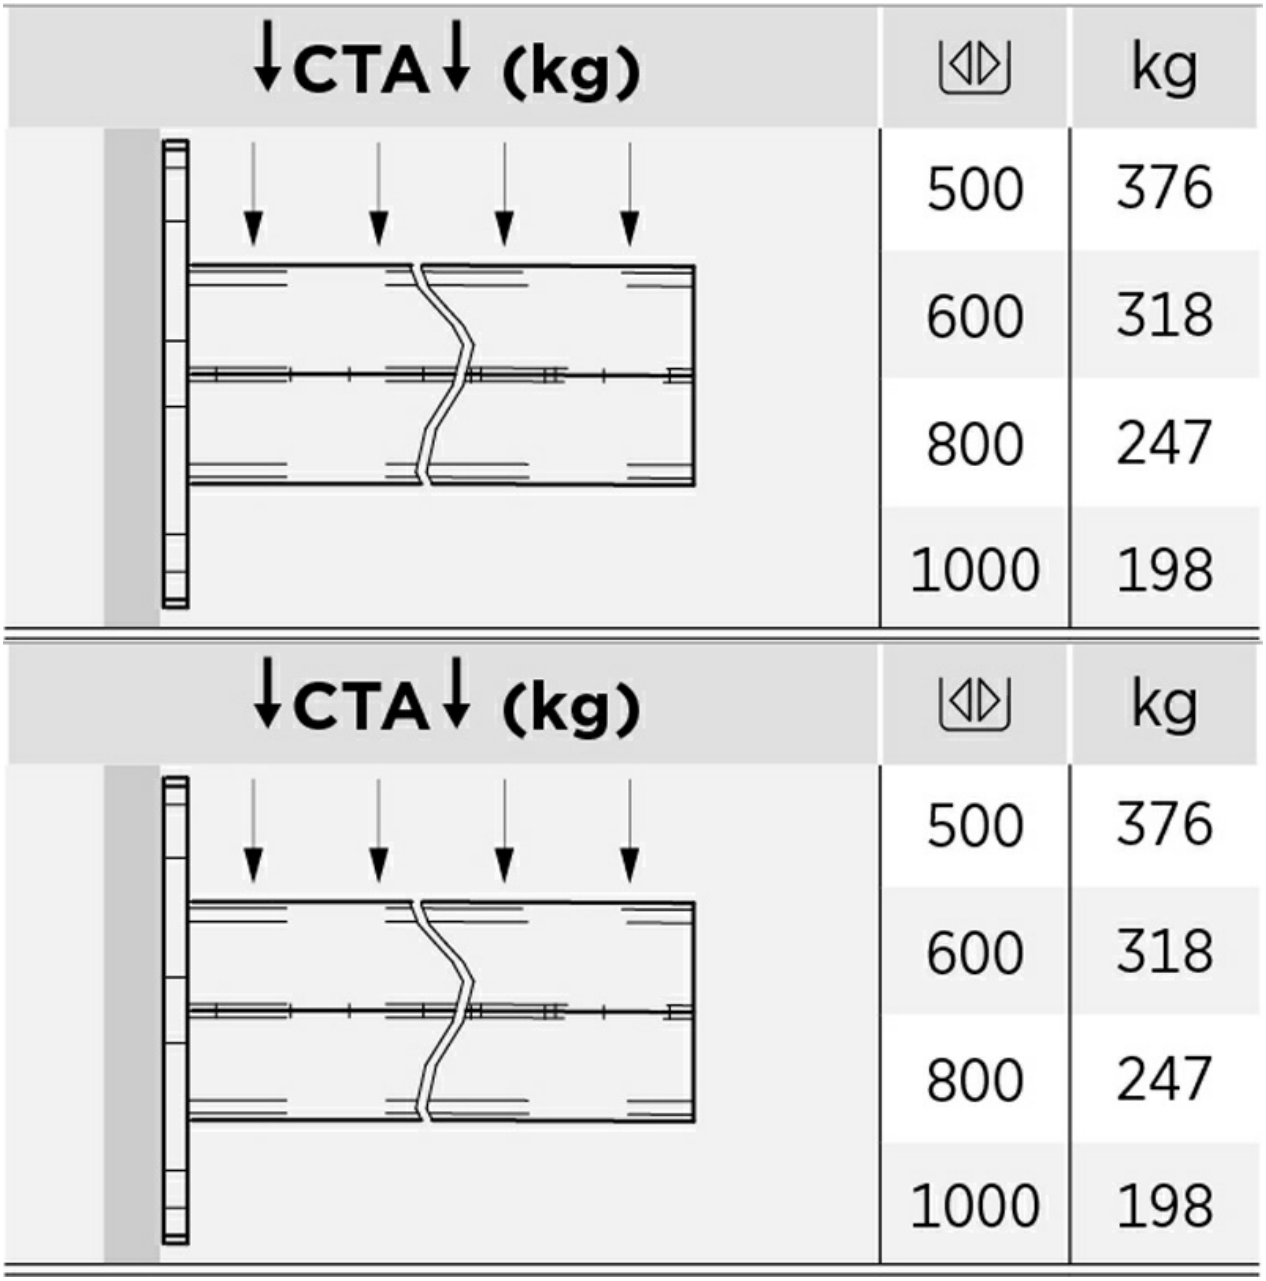


CTA (kg)	kg
500	376
600	318
800	247
1000	198

CTA (kg)	kg
500	376
600	318
800	247
1000	198

Product applications


Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

41x82 Cantilever Arm Pendant (Ref: 82004243)

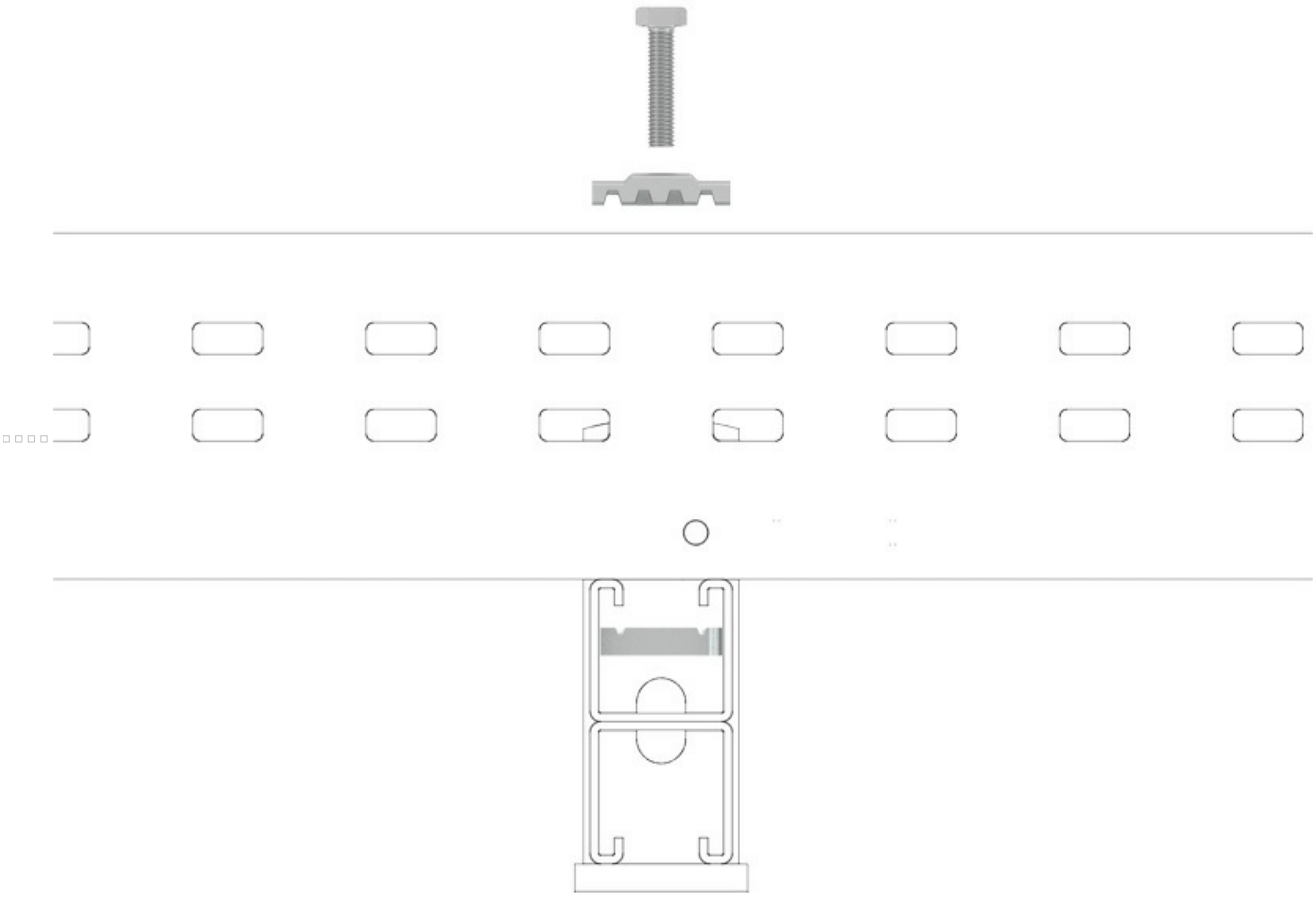


Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

41x82 Cantilever Arm Pendant (Ref: 82004243)

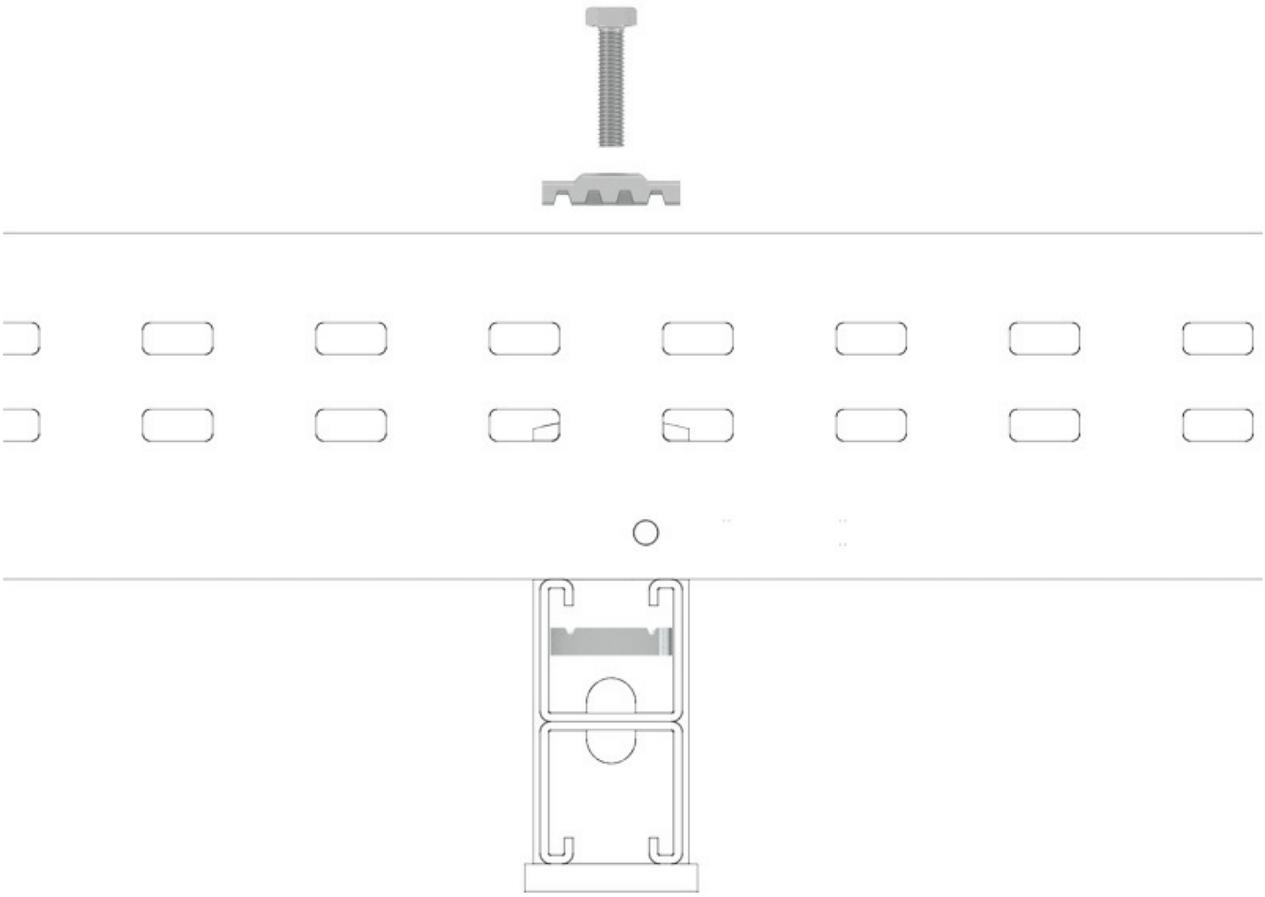

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

41x82 Cantilever Arm Pendant (Ref: 82004243)

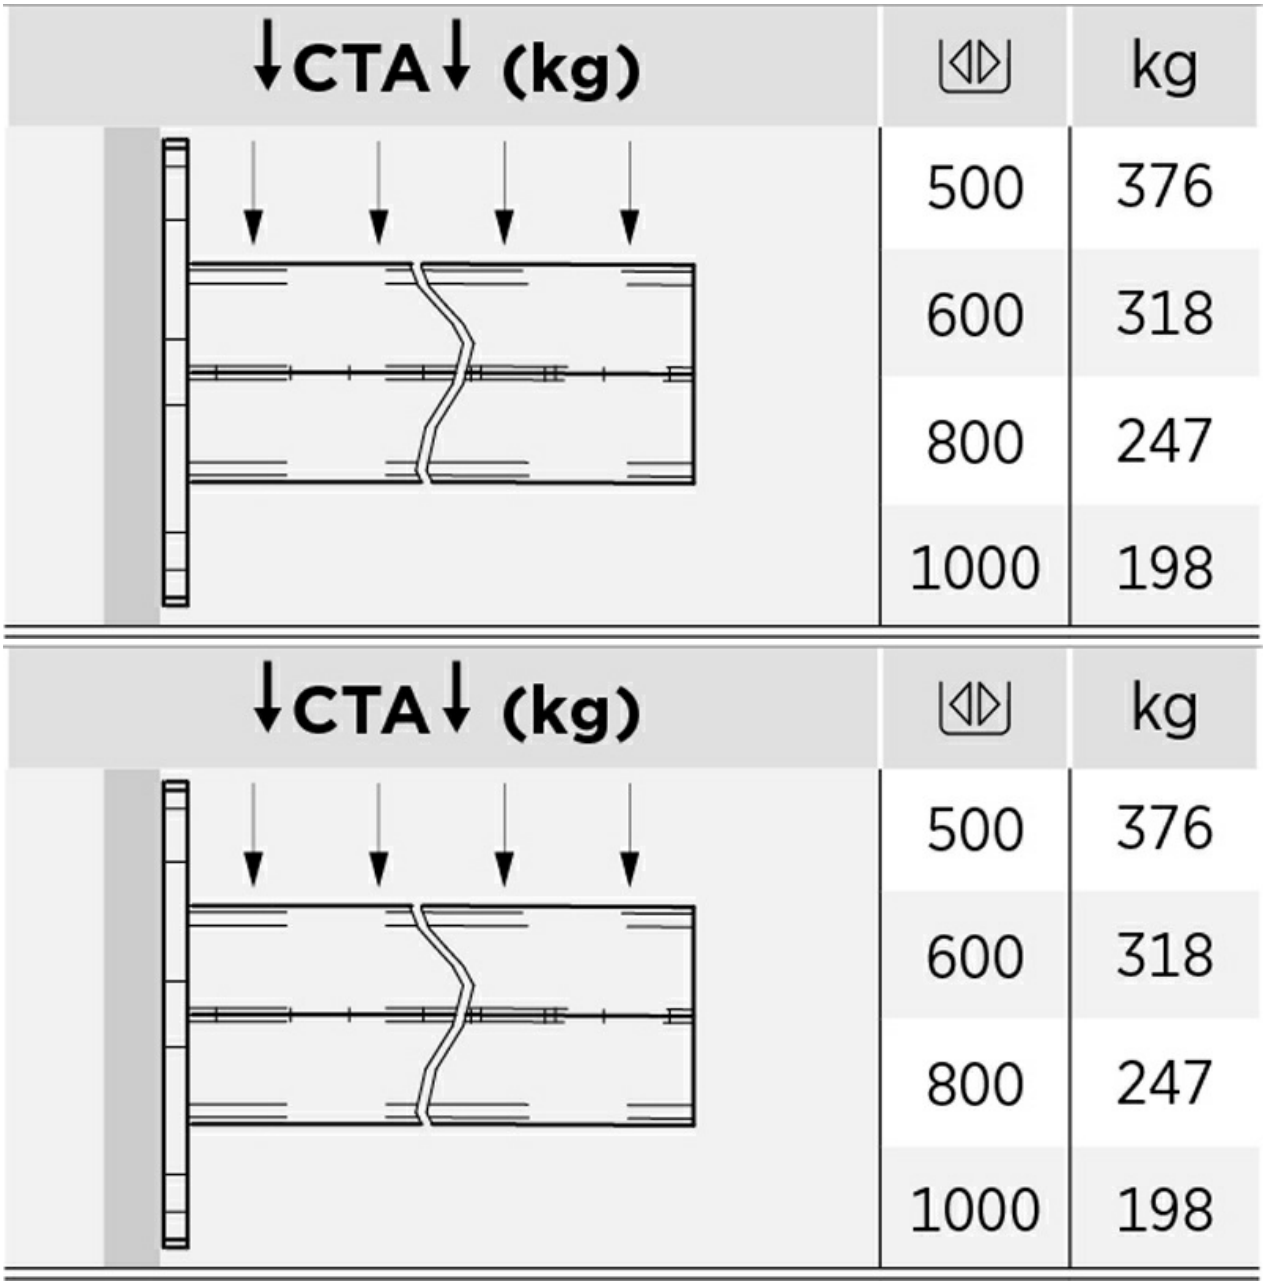

↓CTA↓ (kg)	kg
500	376
600	318
800	247
1000	198

↓CTA↓ (kg)	kg
500	376
600	318
800	247
1000	198

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."