
Cable Tray Accessories

# Outside Riser Cover Click ( Ref: 73066300 )





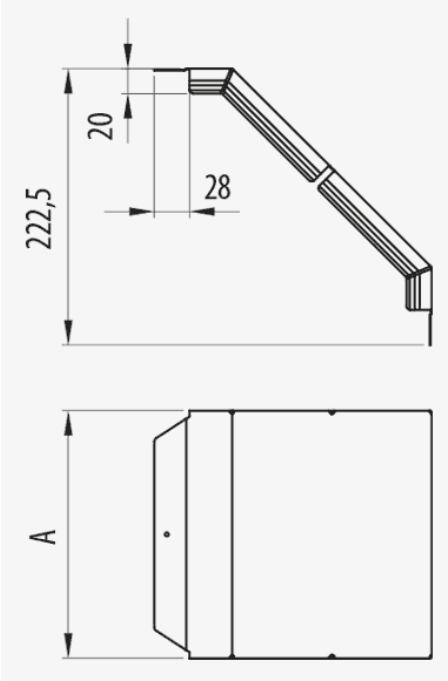


## Description

Metal cover for the protection of cables in the 90° Click Outside Riser. Width 300 mm, With INOX protection system, I316L finish. It has a press-fit assembly system. Made of steel and available in various sizes and Protection Systems.

## Advantages

The ends have an overlap to improve the fit with straight lids.

Available in all sizes and protection systems: PG, GC and stainless steel AISI304 and AISI316.

Press-fit click system requiring no additional parts.

## Applications

It is used for the protection of wiring in the installation of Pemsaband® One perforated and solid tray installations where the 90° Click Outside Riser is used for installations in public buildings, infrastructures and civil works, tertiary sector and industrial applications.

## Solutions



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

# Outside Riser Cover Click ( Ref: 73066300 )

## Product data

| | | | |
|---|---|---|---|
| **ETIM 10** | EC002402 | **kg/u** | 0,623 |
| **Huella de CO2. GWP A1-A3 (kg CO2 eq.)** | | **u** | 1 |
| **Protection System** | INOX | **Material** | Acero inoxidable AISI 316L |
| **Finish** | Stainless Steel AISI 316L | **Working temperature range (°C)** | -50 / 150 ºC |
| **Resistance Class** | Class 9D | **Fire resistance** | A1 No combustible |
| **Width (mm)** | 300 | | |
| **R (mm)** | 100 | | |

## Ⓢ Protection System

**CU** - Copper electroplated

**PG** - Pregalvanised

**EZ** - Electrogalvanised

**BC** - Electrogalvanised Bichromate

**BK8** - High Resistance Coating

**GC** - Hot Dip Galvanising

**INOX** - Stainless Steel

**PT** - Polyester Paint

**AL** - Aluminum

**LN** - Brass or Nickel-plated brass

## Ⓜ Insulating materials

**PC+ABS** - Halogen Free Polycarbonate + ABS

**PVC** - Polyvinyl Chloride

**PP** - Halogen Free Polypropylene

**PA6** - Halogen Free Polyamide 6

**PA12** - Halogen Free Polyamide 12

**PU** - Polyurethane

**PE** - Polyethylene

**NBR** - NBR rubber

**PET** - Thermoplastic Polyester

**TPV** - Thermoplastic



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."