RGp Swivel Connector (Ref: 35010009)

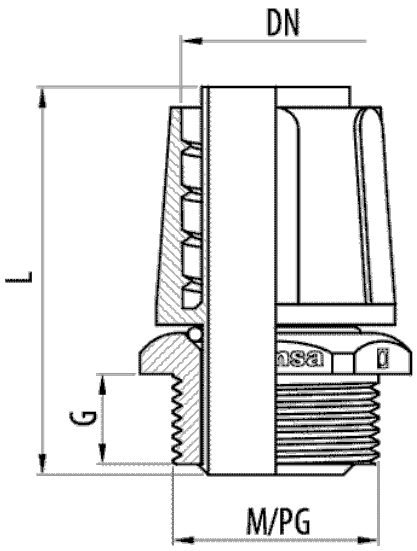

Description

Straight swivel connector made of halogen-free self-extinguishing polyamide 6 for the installation of plastic flexible conduits type TFA, Ecoflex® and TM-PVC. Rotating body that enables the connection of the conduit to the box. Available in metric and PG thread for various sizes of conduit, in grey RAL 7001.

Advantages

CE conformity to the 2014/35 directive and the EN IEC 61386 standard.

It has an independent rotating body that allows the connection of the fitting to the conduit for later connection to the box.

Manufactured in polyamide 6. Self-extinguishing, halogen-free according to UNE/EN 60754-2 y UNE/EN 60754-1 and flame-retardant.

Protection index EN 60529: IP65.

Working temperature: -25°C to + 105°C.

Applications

Suitable for the connection of TFA, TM-PVC and Ecoflex® flexible conduits, in the conduction of electrical cables for building, tertiary and industrial applications.

Solutions

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

RGp Swivel Connector (Ref: 35010009)

Product data

ETIM 10	EC001178	**kg/u**	0,006
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		**u**	100
Colour	Grey RAL 7001	**Material**	Polyamide 6
DN	NW 9	**IP**	IP65
M/PG	PG 9	**Working temperature range (°C)**	-25 / 105 ºC
G (mm)	10	**Fire resistance**	LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA
L (mm)	39		
Torque wrench	21		

Ⓢ Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Ⓜ Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."