


## RB-PA Flexible Conduit (Ref: 10047023)

1/2

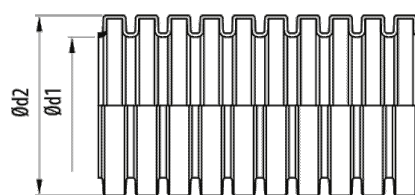

### Description

Very flexible corrugated conduit made of self-extinguishing polyamide 12 in grey RAL 7031 or black RAL 9005, halogen-free and with an IP67 protection rating. The RB-PA flexible conduit of the Pemsaflex® range is recommended for industrial applications, machinery and where high mechanical characteristics are required with a high degree of flexibility.

### Advantages

UL and CSA certification. BD approval. CE conformance with the 2014/35 directive and the IEC 61386 standard. Halogen-free according to EN 50267-2-1 standard. In accordance with standard EN 60204-1 (machine safety).

Excellent performance and flexibility in long work cycles.

Manufactured in polyamide 12. Self-extinguishing, halogen-free and flame-retardant.

Protection index EN 60529: IP67 with the suitable fittings.

Working temperature: -450C to + 105°C.

### Applications

It is recommended for use in industrial applications and electrical installations of machine tools, robot equipment and vehicles. Excellent flexibility and behaviour in outdoor applications.

### Solutions



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Product data			
Colour	Black RAL 9005	Cod. IEC.61386	1342
DN	NW23	Compression strength (N)	125 N
Ø d1 (mm)	21.8	Impact Strength (J)	2 J
Ø d2 (mm)	28.3	IP	IP67
R stat. (mm)	35	Working temperature range (°C)	-25 / 90 °C
kg/u	0.094	Fire resistance	LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA
u	50	UV Behaviour	Resistant
Material	Poyamide 12		

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic