
TR Tee



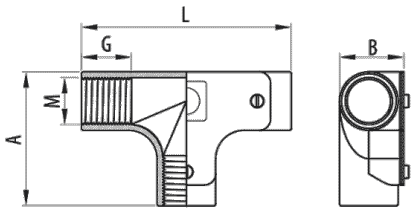

Description

Threaded Tee with removable cover ffor the connection of RR conduits in installations requiring high mechanical performance and an average resistance to corrosion. With an IP54 protection index. Accessory to create a branch in the conduit run. Made of aluminium and available in different diameters.

Advantages

Threaded connection system. Accessory to create branches in the routing of cable conduits.

Protection index EN 60529: IP54.

CE conformity to the 2014/35 directive and the EN IEC 61386 standard.

Made of cast aluminum. Grade 4 corrosion resistance, according to IEC 61386. High indoor and outdoor protection.

Applications

Suitable for the connection of RR metal rigid conduits in building, tertiary and industrial applications with high safety requirements. Premises of public attendance and premises with risk of fire or explosion.

Solutions

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

TR Tee

Main technical characteristics

AL | DN NW16, NW20, NW25, NW32, NW40, NW50 | M16, M20, M25, M32, M40, M50 | Aluminum | IP54

-45 / 400 °C | LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA | ETIM 10 EC002922

Product data

DN			L (mm)	A (mm)	B (mm)	REF	kg/u	
NW16	M16	20	96	61	30.5	55080016	0,136	10
NW20	M20	21.5	96	61	30.5	55080020	0,121	10
NW25	M25	26.5	111	71	35.5	55080025	0,233	8
NW32	M32	32	146	96	51.5	55080032	0,469	2
NW40	M40	33.5	146	96	51.5	55080040	0,734	2
NW50	M50	43.5	183	120	61.5	55080050	1,252	1

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."