


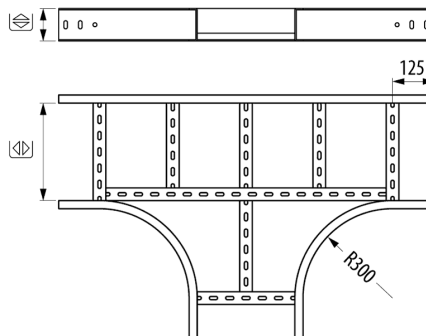

Description

Metal accessory with welded safety edge, for creating a Tee at any point in the Megaband® REP ladder. Of 100 mm height, Width 300 mm. Assembly using bolts. Bend radius 300mm. Check availability of 600mm radius. Made from steel with GC Protection system.

Advantages

Conforms to IEC 61537 and CE Conformity to Directive 2014/35/EU.

Specially designed for the petrochemical sector, with REPSOL approvals, ED-P-11-02

Allows cable installation to be branched from one to two separate wiring lines.

GC Protection System. Hot dip Galvanised with 85 microns of thickness. Class 8 according to IEC 61537.

Applications

Adecuada para la creación de Derivaciones en T con Bandejas Megaband® REP en la conducción de cables en instalaciones eléctricas y de telecomunicaciones en edificios públicos, infraestructuras y obras civiles, instalaciones industriales, sector terciario soportando cargas muy elevadas.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Product data

Protection System	GC	kg/u	16.300
Finish	HDG, Hot Dip Galvanised	u	1
Resistance Class	Class 8	Material	Steel with surface coating
Flange (mm)	100	Impact Strength (J)	20 J
Width (mm)	300	Working temperature range (°C)	-50 / 150 °C
R stat. (mm)	300	Fire resistance	A1 No combustible

Protection System

- CU** - Copper electroplated
- PG** - Pregalvanised
- EZ** - Electrogalvanised
- BC** - Electrogalvanised Bichromate
- BK8** - High Resistance Coating
- GC** - Hot Dip Galvanising
- INOX** - Stainless Steel
- PT** - Polyester Paint
- AL** - Aluminum
- LN** - Brass or Nickel-plated brass

Insulating materials

- PC+ABS** - Halogen Free Polycarbonate + ABS
- PVC** - Polyvinyl Chloride
- PP** - Halogen Free Polypropylene
- PA6** - Halogen Free Polyamide 6
- PA12** - Halogen Free Polyamide 12
- PU** - Polyurethane
- PE** - Polyethylene
- NBR** - NBR rubber
- PET** - Thermoplastic Polyester
- TPV** - Thermoplastic