
FLEXIBL System

17/11/2026

TM-PVC Conduit (Ref: 11060209)



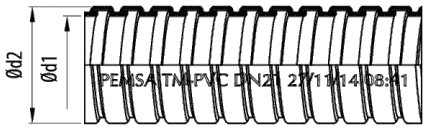

Description

TM-PVC 7035 PVC coated GC protection system steel flexible conduit for the protection of wiring. Flexible corrugated conduit with steel strip, waterproof and self-extinguishing protection (IP65), compression resistance of 1250 N and impact resistance of 6 J. Available in grey (RAL 7035), in a wide variety of sizes.

Advantages

High degree of tightness with RGM and RGP fittings.

High aesthetic component. RAL 7035 grey same as the other conduits or electrical materials.

CE conformity to the 2014/35 directive and the EN IEC 61386 standard.

Made in PVC coated galvanised steel, sealed and self-extinguishing.

No flame propagation.

Applications

Suitable for the protection of wiring and conductors in building, tertiary sector, machinery and industry with high mechanical requirements, electrical installations in suspended and surface conduits according to REBT.

Solutions

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

TM-PVC Conduit (Ref: 11060209)

Product data

ETIM 10	EC001179
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	
Colour	Grey RAL 7035
DN	NW 9
Ø d1 (mm)	11.5
Ø d2 (mm)	14.7
R (mm)	37
kg/u	0,101
u	50

Material	ACERO CON PROT. SUPERFICIAL,PVC
Cod. IEC.61386	4421
Compression strength (N)	1250 N
Impact Strength (J)	6 J
IP	IP65
Working temperature range (°C)	-5 / 60 ºC
Fire resistance	Flame retardant

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."